



LTC 5136 Autodome Controller



The LTC 5136 AutoDome Controller provides complete control of the AutoDome system's advanced features, including proportional speed control, auto tour, 99 presets, and full pan/tilt/zoom operation - all from a single one-handed control unit.

Functions

The LTC 5136 AutoDome Controller is compatible with the standard Allegiant LTC 856x Series Receiver/Drivers, using the Allegiant Bi-Phase control code.

Each of the 16 Bi-Phase control code outputs provided by this control system is capable of transmitting data up to 1.5 km (5000 ft) using 1 mm² (18°AWG) shielded twisted pair cable.

Wiring configurations consisting of either 'star' or 'daisy' chain can be used. In a 'star' configuration, a single camera can be connected to each of the 16 outputs. When using 'daisy chain' wiring configurations, where a single data cable is 'looped' through each of the cameras, up to 8 cameras can be connected to an output.


The LTC 5136 AutoDome Controller includes a 22-key control unit with integral vector-solving pan/tilt/zoom joystick, interface box, and an appropriate power supply.

- ▶ Controls a single AutoDome Camera System or Standard Allegiant Receiver/Drivers
- ▶ Up to 16 individual Bi-Phase control code outputs available
- ▶ Controls all AutoDome System features including auto playback
- ▶ Small, compact design
- ▶ Ergonomic layout for single-handed control

Certifications and Approvals

Electromagnetic Compatibility (EMC)	Complies with FCC Part 15, ICES-003, and CE regulations
Product Safety	Complies with CE regulations, UL, CSA, EN, and IEC Standards


Installation/Configuration Notes

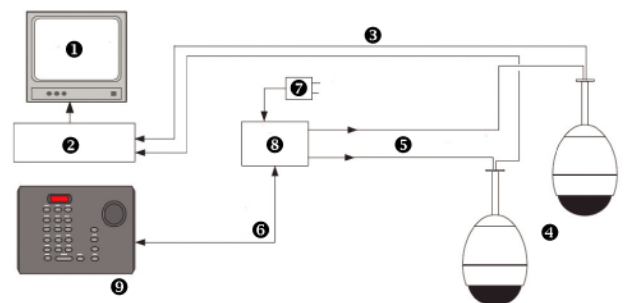

Typical Installation

- 1 Video Monitor
- 2 DVR or Video Switcher
- 3 Video Coax Cable
- 4 Typical AutoDome Camera or Allegiant Receiver/Driver Units
- 5 Up to 16 Bi-Phase Control Code Outputs
- 6 RS-232 Data and Power

- 7 Power Supply Adapter (Supplied)
- 8 Data Converter Unit
- 9 AutoDome Controller

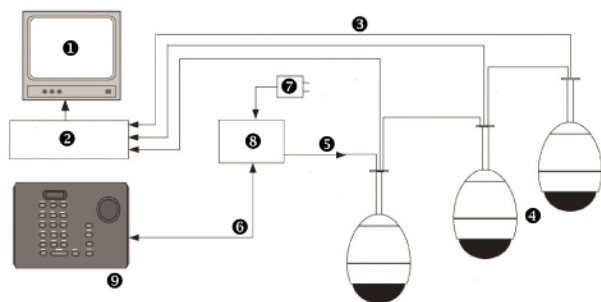

Typical Multiple Camera Sites using Daisy Chain Bi-Phase Control Code Wiring Configuration

- 1 Video Monitor
- 2 DVR or Video Switcher
- 3 Video Coax Cable
- 4 Typical AutoDome Cameras or Allegiant Receiver/Driver Units
- 5 Typical Bi-Phase Control Code Output
- 6 RS-232 Data and Power
- 7 Power Supply Adapter (Supplied)
- 8 Data Converter Unit
- 9 AutoDome Controller

Technical Specifications

Electrical

Includes Control Unit and Interface Box with applicable power supply.

Model No.	Rated Voltage	Voltage Range	Power at Rated Voltage
LTC 5136/51	230 VAC 50/60 Hz	195.5 to 253	6 W
LTC 5136/61	120 VAC 50/60 Hz	105 to 132	6 W

Transmission Distance

1.5 km (5000 ft) using 1 mm² (18 AWG) shielded twisted pair cable (Belden 8760 or equivalent).

Control Unit

Indicators	Camera/entry data; 4-digit 7-segment LED display
Controls	Set, User, Camera, Shot, On, Off, Enter, Clear, Focus, Iris, 10-Digit Numeric Keypad, Joystick

Connector RJ-11

Finish Charcoal

Dimensions (W x D x H) 220 x 155 x 101 mm (8.67 x 6.11 x 4.00 in.)

Weight 0.55 kg (1.2 lb)

Interface Box

Indicator Green data LED

Connectors

Data In 9-pin D connector

Bi-Phase Output Removable terminal blocks with three connections: "+", "-", and "S" (Shield) for each of the sixteen Bi-Phase code outputs

Control Unit Connection RJ-11

Control Unit to Interface Box Cable 3 m (10 ft) with RJ-11 connector

Power Connector Bayonet type

Case Black plastic with metal mounting flanges

Dimensions - Overall (W x D x H) 154 x 132 x 38 mm (6.08 x 5.25 x 1.5 in.)

Weight 0.132 kg (0.7 lb)

Environmental

Temperature Operating: 0°C to 40°C (32°F to 104°F)
Storage: -10°C to 50°C (14°F to 122°F)

Humidity 10%–90%, non-condensing

Ordering Information

LTC 5136/51 Autodome Controller with 16 outputs for AutoDomes or for Allegiant Receiver/Drivers units, 230 VAC, 50/60 Hz	896051365101
LTC 5136/61 Autodome Controller with 16 outputs for AutoDomes or for Allegiant Receiver/Drivers units, 110 VAC, 50/60 Hz	896051366001

Ordering Information

Hardware Accessories

TC6105SC-24X Desktop Control 899380016871
F/TC6207S-24, TC 6230S-24 Scanner,
230 VAC, 50/60 Hz

Americas:

Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 27 83955
Fax: +31 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by