



HRGZ1 Gateway Specifications

Management Software Ranges:

- Maximum Z-Wave modules that can be added to the Gateway: 232
- Maximum Cameras that can be added to the Gateway: 32
- Maximum Scenes that can be added to the Gateway: 64
- Maximum Thermostats that can be added to the Gateway: 16
- Maximum amount of modules that can be added to Scenes: 1024
- Maximum amount of Rooms/Areas that can be added to the Gateway: 64
- Maximum amount of Schedules that can be set: 128
- Maximum amount of Notification User Accounts: 16
- Maximum Login Password length: 16

Network Specifications:

Internet Connectivity:

- 100T Base-TX Fast Ethernet

Home Control and Monitoring

- Z-Wave US Operating Frequency / Z-Wave Wireless Mesh Network

Hardware Interface:

- LAN Port: (1) RJ-45, 10/100M, Auto-sensed
- One non-removable extended range antenna (Z-Wave)
- External Power Supply Connector
- LEDs: Power, Z-Wave activity and Network connection
- Reset Button

HTTP/Utility/Interface:

- Web-based Management Interface
- CD based / Web-Based Setup Wizard
- Cellular phone management software (Cell Link) - Java based native application

Dimensions:


- Gateway: 6.6" x 3.75" x 1.6" (L x D x H)
- Giftbox: 10.5" x 3.5" x 7.5" (L x D x H)

Operating Environment:

- Temperature: 0 - 40o C / 32 - 104o F
- Humidity: 85% RH

Certifications:

- FCC
- UPC: 603992-506521
- Warranty: 1 Year

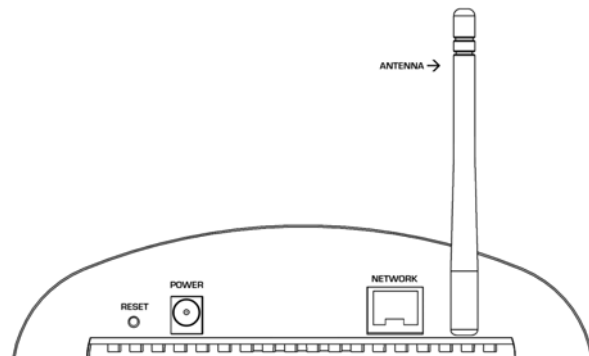



Handheld Remote Control Specifications

Ranges:

- 6 Channels
- ON / OFF / DIM (Hold down ON or OFF buttons)
- 16 Devices Maximum per channel
- 96 Total Devices

Dimensions:

- 6" x 2.38" x 1" (L x D x H)

Operating Environment:

- Temperature: 0 - 40o C / 32 - 104o F
- Humidity: 85% RH

Power:

- 4 x AAA Batteries

Certifications:

- FCC, IC

Warranty

- 1 Year

