



UH204

4-Port USB 2.0 Hub



PACKAGE CONTENTS:

- ◆ One 4-Port USB Hub with 12" cable attached
- ◆ One Quick Installation Guide

Get Connected with Hawking

The Hawking pocket size USB Mini Hub is designed for you to connect additional USB devices quickly and easily to your PC or MAC. The UH104 USB Mini Hub is so small that you can take it anywhere you go! With USB Bus power, there is no need for external power. The UH104 is Plug & Play so you can easily connect USB devices without having to opening the case of your computer. This product is ideal for notebook and desktop users where USB ports are limited. Hawking's UH104 USB Hub supports 1 upstream port and 4 downstream ports with transfer rates of 12Mbps data, 100 times faster than regular serial port. Use this Mini Pocket size Hub to connect USB devices such as Keyboard, Mouse, Modem, Network Adapter, WebCam, Digital Cam, and other devices.

System Requirements

- ◆ Pentium 233MHz or Higher Processor
- ◆ Windows 98SE, ME, 2000, XP or Mac OS X or higher
- ◆ One Available USB Port

UH204

- 1 Year Warranty
- USB Plug and Play
- Mac and PC Compatible
- Compact & Light Weight

SPECIFICATIONS

Ports

- ◆ Four

Cable Length

- ◆ 12 in

Standards

- ◆ USB Specification 2.0

Dataspeed

- ◆ Low: 1.5 Mbps
- ◆ High: 480Mbps

Upstream Port

- ◆ One Type-A Plug

Downstream Port

- ◆ Four Type-A Receptacle

Output Voltage

- ◆ Per port DC +5V

Output Current

- ◆ Total for 4 ports: 500mA

Weight

- ◆ 2oz (56.7g)

Dimensions:

- ◆ 2.1 x 2.7 x 1.1 in
- ◆ 53 x 68.2 x 28 mm

Temperature

- ◆ Storage: -10 ~ 85 degree Celcius
- ◆ Operation: 0 ~40 degree Celcius

Humidity (non-condensing)

- ◆ Storage: 10%~90%
- ◆ Operation: 10%~70%

Power Consumption

- ◆ 2.5 Watts (Maximum)

EMI Conformance

- ◆ FCC Class B
- ◆ CE Mark Class B
- ◆ RoHS

HAWKING TECHNOLOGIES, INC

USA: Irvine, California

Sales: 888.662.8828 or 949.790.0800

Fax: 949.790.0880

Email: sales@hawkingeurope.com

Email: customersupport@hawkingeurope.com

EUROPE: Rotterdam, The Netherlands

Sales: 31-10-245-1600

Fax: 31-(0)10-245 1616

Email: sales@hawkingeurope.com

Email: customersupport@hawkingeurope.com


READY, NETWORK AND GO!

Step 1 - Locate an open USB port on your PC or Mac

Step 2 - Plug in the USB connector on the UH204 into the open USB port on your PC or Mac.

Step 3 - Now UH204 is ready to go!

NETWORK DIAGRAM

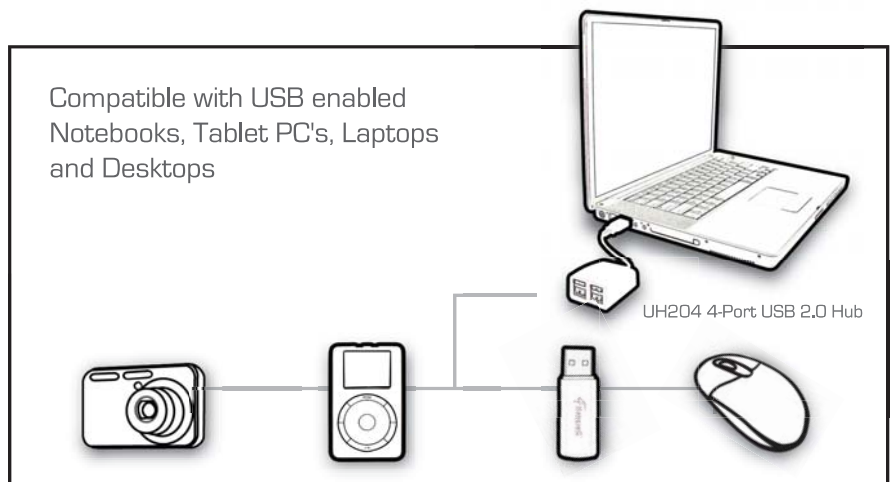

FEATURES

- ◆ Compliant with the Standard Specification of USB 2.0 and 1.1
- ◆ Supports self-powered mode and bus-powered mode
- ◆ All downstream port support full-speed and low-speed operations
- ◆ Supports Plug & Play specification
- ◆ Individual power switch on each port
- ◆ Soft start for slow turn-on feature to prevent high inrush currents from the initial powered capacitive loads
- ◆ Reset by upstream attachment or programmable reconfiguration
- ◆ Bus fault detection and recovery
- ◆ Provides four (4) downstream port and one (1) upstream port