

(855) 235-1718

 AirTrack

At the Forefront of Data
Collection Technology

2 yr.
Warranty

STANDARD

AirTrack DP-1 Desktop Thermal Printer

The AirTrack DP-1 desktop thermal barcode printer is a space-saving and efficient printer. Print 1D and 2D barcode labels between 1.57" and 4.33", useful in the retail, warehouse, distribution and other industries. Add AirSupport service to your DP-1 barcode printer for extended comprehensive warranty coverage, 30 days technical support, AirSpare, and more.

KEY FEATURES:



1D BARCODES



2D BARCODES



4" / SECOND




4MB MEMORY

INDUSTRY APPLICATIONS:

- Retail & hospitality point of sale
- GS1 label barcode printing
- Asset tracking
- Specimen labeling
- Compliance labeling
- Shipping & receiving

To see all complete features, visit:
www.AirTrack.com/airtrack-dp-1/

COMPACT
THERMAL
PRINTER

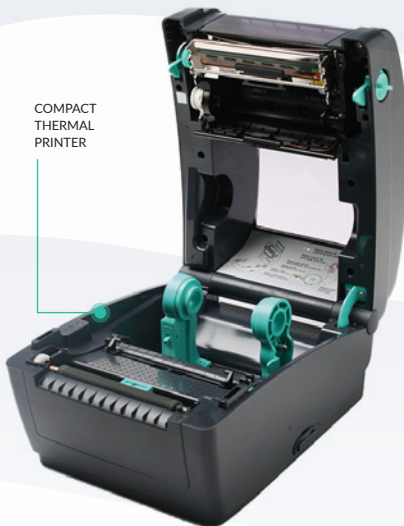

Low Volume, Compact Thermal Printing

Weighing in at just over 5 pounds, the AirTrack DP-1 barcode printer is small enough to fit onto any desk or work surface, giving you access to powerful thermal barcode printing anywhere. The maximum print speed is up to 4" per second (102 mm), so you can keep up with your work. Easily print 1D and 2D barcodes on high-quality AirTrack continuous, die-cut, tag, and fan-fold labels.

Flexible Barcode Printing Options

In addition to the continuous, die-cut, tag, and fan-fold label options, the DP-1 can print on media between 20 and 112 mm (0.79" to 4.4") wide and between 0.06 and 0.19 mm thick. The DP-1 printer works with label rolls between 10 and 2,286 mm (0.39" and 90") long.

EXPERIENCE THE POWER OF

AirSupport



What is AirSupport?

In addition to industry-leading warranties, add AirSupport to your products for:

- Extended warranty coverage against defects
- Comprehensive coverage on select products
- 30 days seller technical support
- Free 30-day demo for pilots
- AirSpare – If your device stops working due to a manufacturing defect, get a comparable spare while we evaluate it*

AirSupport & Add-on Plans (options vary by product)

COVERAGE	5-DAY AirSupport	2-DAY AirSupport	Overnight Replacement	Preventative Maintenance
Factory Parts & Procedures	✓	✓	✓	✓
Selected Factory Upgrades	✓	✓	✓	✓
Defects in Material/Workmanship	✓	✓	✓	✓
Normal Wear & Tear	✓	✓	✓	✓
Comprehensive (accidental damages)		✓	✓	✓
Turnaround Time	5-Business Days	2-Business Days	Overnight Replacement	24/48 Hours
Transport		Two-way Express	Two-way Ground. Express	
LENGTH OF COVERAGE				
3-Year & 5-Year (from start)	✓	✓	✓	
1-Year Renewal	✓	✓	✓	✓

*Spare will be overnighted by the seller. If user error is found, we will return damaged device or offer flat rate repair.



AirTrack DP-1 PRINTER SPECS

SPECIFICATIONS

PRINTING SPECIFICATIONS

Printing Method	Thermal Transfer & Direct Thermal
Resolution	8 dots/mm (203 DPI)
Max Print Speed	102 mm (4")/second
Max Print Width	108 mm (4.25")
Max Print Length	2,286 mm (90")
Internal Fonts	8 alpha-numeric bitmap fonts Monotype Image® true type font engine with one CG Triumvirate Bold Condensed scalable font

BARCODE SYMBOLOGY

Barcode	1D bar code: Code 39, Code 93, Code 128UCC, Code 128 subset A, B, C, Codabar, Interleave 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2 (5) digits add-on, MSI, PLESSEY, POSTNET, GS1 DataBar, Logmars, Code 11 2D bar code: PDF-417, Maxicode, DataMatrix, QR code, Aztech
Font & Barcode Rotation	0, 90, 180, 270 degree

MEDIA SPECIFICATIONS

Label Roll Capacity	127 mm (5") OD
Ribbon	110 m long, max. OD 40 mm, 0.5" core (ink coated outside)
Ribbon Width	40 mm ~ 110 mm (1.57" ~ 4.33")
Media Type	Continuous, die-cut, tag & fan-fold (outside wound)
Media Width	20 ~ 112 mm (0.79" ~ 4.4")
Media Thickness	0.06 ~ 0.19 mm (2.36 ~ 7.48 mil)
Label Length	10 ~ 2,286 mm (0.39" ~ 90")

PHYSICAL SPECIFICATIONS

Enclosure	Double-walled plastic
Physical Dimensions	202mm (W) x 173 mm (H) x 258 mm (D) 7.95" (W) x 6.81" (H) x 10.16" (D)
Weight	2.3 kg (5.07 lbs)

WARRANTY

2 Year

PRINTER SPECIFICATIONS

Processor	32-bit RISC CPU
Memory	4 MB Flash memory, 8 MB SDRAM, SD Flash memory card reader for Flash memory expansion, up to 4 GB
Interface	USB 2.0, RS-232, Centronics, Internal Ethernet, 10/100 Mbps Bluetooth (user option)
Power	External universal switching power supply Input: AC 100-240V, 2.5A, 50-60 Hz Output: DC 24V, 2.5A, 60W
Operation Switch, Button LED	1 power switch, 1 feed button & 1 LED (3 colors: green, amber & red)
Sensors	Gap transmissive sensor, Black mark reflective sensor (position adjustable) Head open sensor, Ribbon end sensor
Printer Language	AirTrack Firmware™ (Compatible to EPL, ZPL, ZPL II)

OPERATING CONDITIONS

Environmental Conditions	Operation: 5 ~ 40°C, 25 ~ 85% non-condensing Storage: -40 ~ 60°C, 10 ~ 90% non-condensing
--------------------------	--

REGULATIONS

Safety Regulations	FCC Class B, CE Class B, C-Tick Class B, UL, CUL, TÜV/Safety, CCC
Environmental Concerns	Comply with RoHS, WEEE

ACCESSORIES

Accessories	Windows labeling software CD disk; Quick start guide; External universal switching; power supply; USB cable; Power cord
-------------	---

OPTIONS

Factory Options	N/A
Dealer Options	Guillotine cutter (full cut or partial cut)
User Options	Peel-off module, External media hanger with 3" OD label spindle, Bluetooth module (serial interface)