

Overview

- These units provide centralized UTP video, RS422/RS-S485 data and distributed camera power over a single CAT-5 (or higher) cable to simplify CCTV installations for distances up to 750 feet. They feature eight (8) built-in individually selectable 24/28VAC power outputs. It is universally configurable for both AC and/or DC cameras when used in conjunction with HubWay Series matching AC (HubWayA) or DC (HubWayD) video balun combiners.

**HubWay2**

- Eight (8) fuse protected outputs.
- Balun combiners not included.

HubWay22

- Eight (8) fuse protected outputs.
- Eight (8) 24VAC/28VAC video baluns combiner.

HubWay23

- Eight (8) fuse protected outputs.
- Eight (8) 12VDC video baluns combiner.

HubWayA

- 24VAC/28VAC video balun/data/power combiner.

HubWayD

- 12VDC video balun/data/power combiner.




Specifications

- 24VAC or 28VAC individually selectable output.
- 8 amp total output current.
- Eight (8) channel combined power, data and video (up to 750 ft.).
- 1 amp max per channel.
- Input 115VAC 50/60Hz, 3.5 amp.
- Data:
 - Eight (8) data/PTZ inputs.
- Video:
 - Eight (8) 75 ohm video inputs.
- In-line fuse rated at 5A/250V.
- Eight (8) individual power LED indicators.
- Illuminated master power disconnect circuit breaker with manual reset.
- Removable terminal blocks w/locking screw flanges.
- 3-wire grounded line cord.
- Spare fuses provided.
- Product weight (approximate):
 - HubWay2: 14.6 lbs.
 - HubWay22: 14.8 lbs.
 - HubWay23: 14.8 lbs.
- Shipping weight (approximate):
 - HubWay2: 15.6 lbs.
 - HubWay22: 15.8 lbs.
 - HubWay23: 15.8 lbs.

Enclosure Dimensions

3.25"H x 19.125"W x 8.5"D

View from back

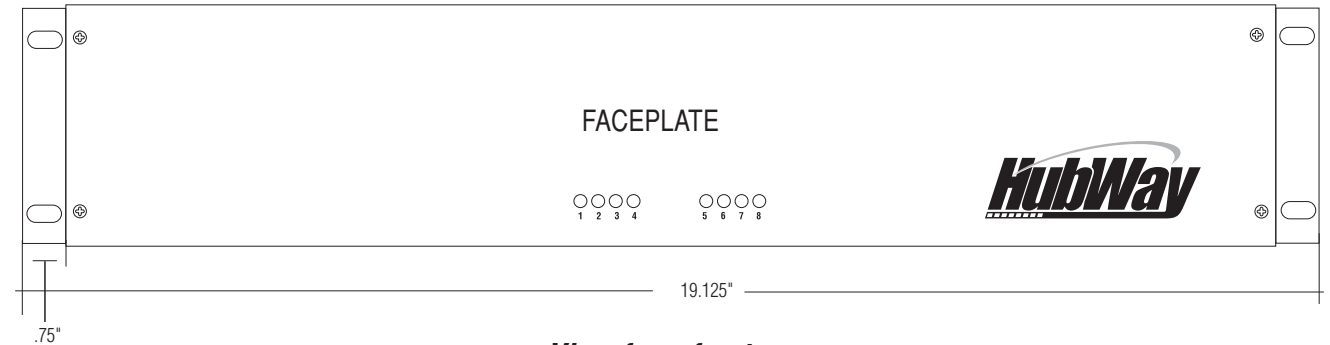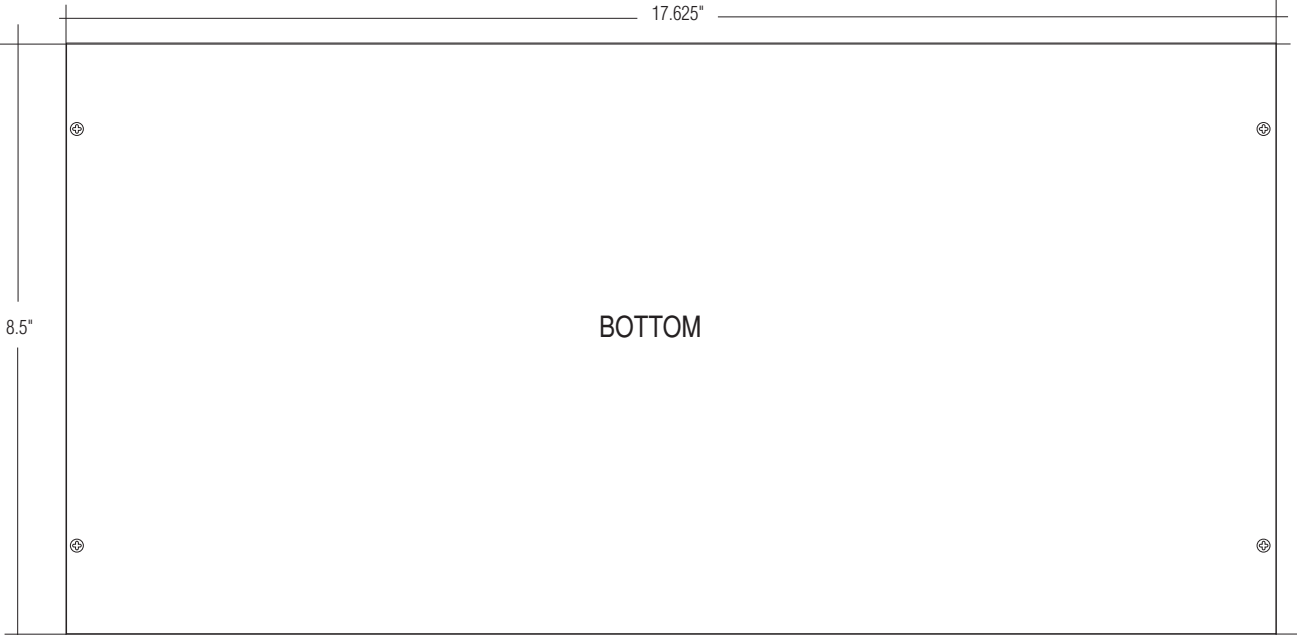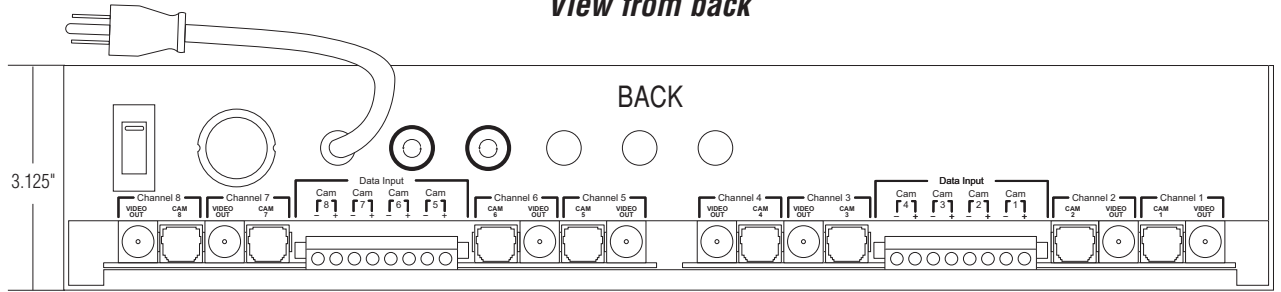

View from front