

Temperature Screening Kiosk

Our Temperature Screening Kiosk is a non-contact kiosk designed to help prevent the spread of viruses and maintain a safe and healthy environment for your employees, visitors, and the general public.



Safe, Efficient Access Control

To ensure optimal performance, the kiosk is built on a RK3288 / RK3399 / Qualcomm MSM8953 high-performance hardware platform, equipped with industrial-class binocular camera, live face recognition technology and infrared thermal imaging module to support face-with-mask identify. It supports 1: 1 and 1: N face comparison and retrieval, face-with-mask recognition, and human temperature detection. It supports automatic alarm for body temperature abnormality. It also supports expansion of various peripherals such as ID card readers, fingerprint readers, etc., which can be applied to gate passages and attendance system to achieve safe and efficient access control for personnel.

FEATURES INCLUDE:

- Hands-free, touchless device
- Fast (~1) second detection with automatic alarm
- Temperature accuracy +/- 0.9 Deg F
- Accurate facial recognition even with face mask
- Easy Plug & Play setup
- Built for reliability: dustproof & waterproof
- Steel base plate and anodized aluminum pedestal
- Use cases: entry points, access gates to buildings, campuses, clinics, communities, offices, schools, hotels, public venues, retail stores, and transportation hubs.

Contact your account manager for custom branding and configuration options.

Camera	
Resolution	2 megapixels
Type	Binocular wide dynamic camera
Aperture	F2.4
Focusing Distance	50 ~ 150cm
White Balance	Auto
Photo Flood Light	LED and IR dual photo flood light

Screen	
Size	8.0 inch IPS LCD screen
Resolution	800 x 1280

Processor	
CPU	RK3288 quad-core (optional RK3399 six-core, MSM8953 eight-core)
Storage	EMMC 8G

Interface	
Network Module	Ethernet and Wireless (WIFI)
Audio	2.5W / 4R Speakers
USB	1 USB OTG, 1 USB HOST standard A port
Serial Communication	1 RS232 serial port
Relay Output	1 open door signal output
Wiegand	One Wiegand 26/34 output, one Wiegand 26/34 input
Wired network	1 RJ45 Ethernet socket
Interface Expansions available	ID card reader, fingerprint reader, IC card reader, two-dimensional code reader, etc.

Contact your account manager for custom branding and configuration options.

Function	
Face Library	Up to 30,000
1: N Face Recognition	Support
1:1 Face Comparison	Support
Stranger Detection	Support
Identify Distance Configuration	Support
UI Interface Configuration	Support
Interface	Interfaces include device management, personnel / photo management, record query, etc.
Deployment Method	Support public cloud deployment, privatized deployment, LAN use, standalone use
Facial Recognition	<p>Supports 30,000 face database</p> <p>The 1:1 comparison recognition rate is more than 99.7%, the 1: N comparison recognition rate is more than 96.7% @ 0.1% false positive rate</p> <p>Live detection accuracy rate is 98.3% @ 1% false positive rate. Face recognition pass speed is less than 1 second</p>


General Parameters	
Power	DC12V (±10%) Optional Battery: 50,000 mah / 185 wh
Operating Temperature	32 °F ~ 140 °F
Storage Temperature	-4 °F ~ 140 °F
Power Consumption	13.5W (Max)
Installation Method	Pedestal and Countertop options
Pedestal Size	Height: 60.5" Base Plate Diameter: 18" Pole Diameter: 4"
FCC Compliance	ANSI C63.4- 2014 (Information Technology Equipment) has been assigned against CISPR PUB. 222, FCC Part 15 Subpart B and has the FCC mark. TAF testing laboratory 1439. Attestation of conformity available on request
CE Compliance	Directive(s) REDS 2014/53/EU , Attestation number 2003118. Applicable standards ETSI EN 300 328 V2.1.1 (2016); EN 62311:2008; ETSI EN 301 489-1 V2.1.1 (2017); ETSI EN 301 489-17 V3.1.1. Attestation of Conformity available on request

Contact your account manager for custom branding and configuration options.

Infrared Thermal Imaging Module	
Temperature Detection	Support
Temperature Detection Distance	3 feet 4 inches (1 Meter)
Temperature Measurement Accuracy	$\leq \pm 0.9^{\circ}\text{F}$
Temperature Measurement Range	50°F~ 107.6°F
Thermal Field of View	89.6 x 89.6°
Abnormal Temperature Alarm	Support (temperature alarm value can be set)

The Ultimate in Safety and Security

The Temperature Screening Kiosk can be used with access gates and attendance for communities, campuses, office buildings, schools, hotels, sports venues, retail stores, transportation hubs and other public service areas.

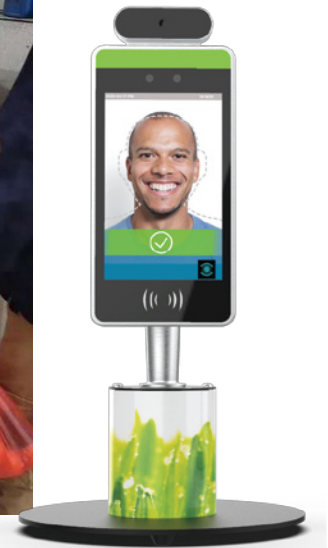

Custom branding and configuration options available!

Contact your account manager for more information today.