

SLP-DL410

4 inch Direct Thermal
Desktop Label Printer



Logistics



Ticketing

Stadium
& Arenas

Warehousing




Healthcare



Retail

Ultra-Compact, Economic & Specialized

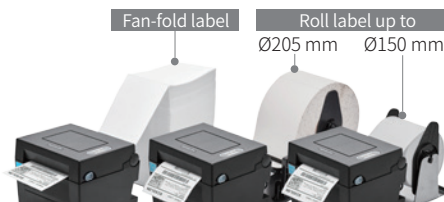

Small Foot Print and Versatile Features

- Compact and space-saving design
- Supporting a wide range of media types such as fan-fold or large labelling
- Various Options: external roll media, peeler and auto-cutter




The World's
Most Compact

5
IPS



Premium-Level Performance

- Fully compatible with market-leading programming Languages
- Smart switch programming languages without setting the mode
- Fast data processing and a printing speed up to 5 ips (127 mm/sec)
- Smart Media Detection™

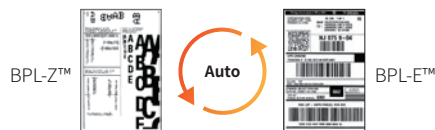

Made for
iPod iPhone iPad



Mobile Device Compatibility

- The World's first - desktop label printer with built-in Bluetooth and MFi iAP2 certification
- Smart Bluetooth Auto Switch: switching from iOS mode to standard Bluetooth mode
- Compatible with smart mobile devices

BIXOLON®
a Better Solution for your Business™

SLP-DL410

4 inch Direct Thermal Desktop Label Printer

Specifications

Printer Specifications

Print Method

Direct Thermal

Print Speed

SLP-DL410: Up to 5 ips (127 mm/sec)
SLP-DL413: Up to 5 ips (127 mm/sec)

Print Resolution

SLP-DL410: 203 dpi
SLP-DL413: 300 dpi

Print Width

SLP-DL410: Up to 108 mm
SLP-DL413: Up to 105.7 mm

Print Length

6 ~ 2000 mm

Sensor

Transmissive, Reflective (adjustable),
Head open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

25 ~ 116 mm

Media Roll Diameter

External roll media options up to
Ø 150 mm to 205 mm

Media Thickness

0.06 ~ 0.20 mm

Physical Characteristics

Dimensions (WxDxH)

177 x 150 x 148.5 mm
(6.97 x 5.91 x 5.85 inch)

Weight

1.6 kg (3.53 lbs.)

Power

EnergyStar Certified,
Internal Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory

64MB SDRAM, 128MB FlashROM

Interface Options

Standard: USB+WALN*

Optional: ① USB+Ethernet+WLAN*

② USB+Ethernet+WLAN*+Bluetooth**

③ USB+WLAN*+Bluetooth**

* WLAN: 802.11b/g/n USB dongle type (optional)

** Bluetooth: Built-in type, MFi iAP2 certified

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Software

Emulation

SLCS, BPL-Z™, BPL-E™

Drivers

Windows Driver (Euro Plus/Seagull),

Linux / Mac CUPS Driver,

Virtual COM USB/Ethernet Driver,

Utility Program, Label Artist™

SDKs

Android SDK, iOS SDK, Windows SDK

Fonts / Graphics / Symbologies

Fonts

- 10 SLCS Resident Bitmap Fonts
- One SLCS Resident Scalable Font
- 16 BPL-Z™ Resident Bitmap Fonts
- One BPL-Z™ Resident Scalable Font
- 5 BPL-E™ Resident Bitmap Fonts
- 23 Code Page
- Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 11, Code 39, Code 93,
Code 128, EAN-13, EAN-8, Industrial 2-of-5,
Interleaved 2-of-5, Logmars, MSI, Plessey,
Postnet, GS1 DataBar (RSS-14), Standard
2-of-5, UPC/EAN extensions, UPC-A, UPC-E,
IMB

2D: Aztec, Codablock, Code 49, Data Matrix,
MaxiCode, MicroPDF417, PDF417,
QR code, TLC 39

Options

Ethernet, WLAN (USB dongle type), Peeler,
Auto Cutter, RTC (Real Time Clock),
Bluetooth(Built-in type),
External Paper Supply, External Power Adaptor

