



6115

Perfect pizzas and a healthier bottom line


Great for use in food service operations to build consistent products and help control costs, thereby maximizing customer satisfaction and profitability.

- ◆ **Innovative “Touchless” Zero Mechanism**
Just wave or place your hand over the display to zero the scale.
- ◆ **Pan / Tray Stops**
Keeps product in center of scale.
- ◆ **Full Capacity Zero**
Weigh each ingredient as it is added.



Perfect pizza and a healthier bottom line

The Model 6115 is perfect for use in pizza parlors, sandwich and salad shops, bakeries, supermarkets - anywhere portion control is required to maintain product quality and save on ingredient costs. The innovative "touchless" zero mechanism increases throughput, greatly extends the life of the scale and significantly enhances food handling safety.

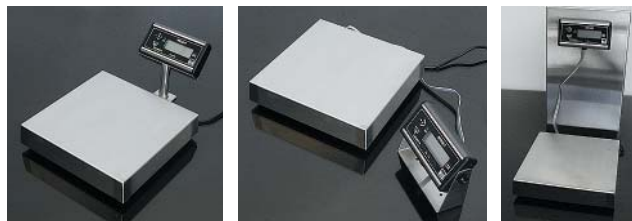

Features & Benefits

- ◆ **Innovative "Touchless" Zero Mechanism**
Just wave or place your hand over the display to zero the scale. This feature significantly improves hygiene, while eliminating the physical wear and tear on a normal button switch mechanism.
- ◆ **Easy to Read** Angled six digit LCD display with large 0.5" (12 mm) characters.
- ◆ **Easy to Use** User friendly interface keeps operation simple and reduces training time.
- ◆ **Easy to Clean** Removable stainless steel platter, detachable display and bracket.
- ◆ **Accurate** Weigh anywhere on the platter – even in all four corners.
- ◆ **Full Capacity Zero** Weigh each ingredient as it is added.
- ◆ **Superior Durability / Quality Construction** Stainless steel weighing area with welded corners and full skirt around perimeter of the base. Heavy-duty load cell and load stop mechanism ensures long life.
- ◆ **Low Profile** Only 2.5" (64 mm) tall. Perfect for use on top or recessed into prep table.
- ◆ **Unique Design** Three legged stool design keeps scale stable on any surface.
- ◆ **Power Supply** Internally mounted with standard wall plug. No large wall adapter to plug in or take up two receptacle spaces.
- ◆ **Internally Configurable Units of Measure**
Decimal pounds, ounces, or grams.
- ◆ **I/O Port** RS-232 serial output for interface to software programs, enabling inventory control.
- ◆ **Options** Several display location options (below), footswitch, standard zero button. See separate options sheet for details.

Specifications

- ◆ **Capacity/Resolution**
Factory Set As: 240 oz x 0.1 oz
- ◆ **Optional Capacities/Resolutions**
Pounds: 15 lb x 0.005 lb; 25 lb x 0.01 lb
Ounces: 400 oz x 0.25 oz
Grams: 6000 g x 2 g; 10000 g x 5 g
- ◆ **Dimensions**
Weigh platter dimensions: 13" x 13" (330 mm x 330 mm)
Base dimensions: 13.4" x 13.4" (340 mm x 340 mm)
Adjustable height: 2.5" – 3" (64 mm – 76 mm)
Remote display enclosure:
5.8" (W) x 3.0" (H) x 1.4" (D max)
(147 mm x 75 mm x 36 mm)
- ◆ **Power**
120 VAC (+10%, -15%) 60Hz (+/- 3Hz). Internally mounted adapter. Standard 3 wire with ground input.
- ◆ **Output**
15 VDC @ 0.3 Amps minimum
10% – 90% RH, (non-condensing)
- ◆ **Operating Environment**
41° F – 104° F (5° C – 40° C)
10% – 90% RH, (non-condensing)
- ◆ **Agency Approvals**
UL Listed, CSA Certified Power Supply
NSF Approved
NOT Legal for Trade
- ◆ **See separate sheet for standard configurations**

© Avery Weigh-Tronix, LLC 2010. All rights reserved. This publication is issued to provide outline information only which, unless agreed by Avery Weigh-Tronix in writing, may not be regarded as a representation relating to the products or services concerned. Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

Avery Weigh-Tronix (Retail North America)

1000 Armstrong Drive, Fairmont, MN 56031

PH Toll-Free: 800-637-0529

PH: 507-238-8702

FAX: 507-238-8271

E-mail: sales@salterbrecknell.com
Internet: www.salterbrecknell.com

Avery Weigh-Tronix



Product complies with F.C.C.