



# PortServer® TS M MEI

Device Server Modem Series

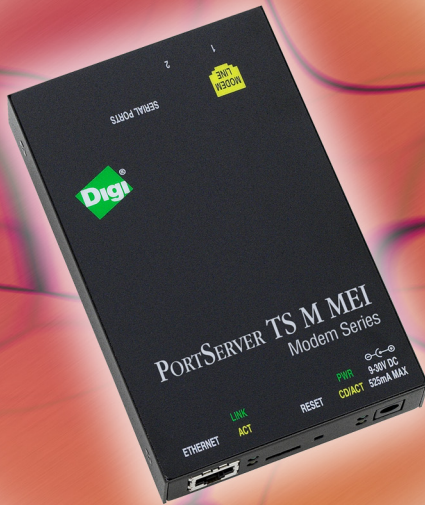

PortServer TS M MEI device servers are ideal for applications requiring both Ethernet connectivity and remote dial-up access to serial devices.

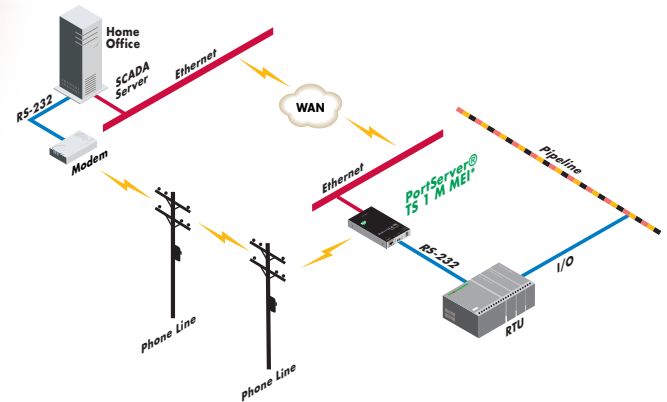

\*MEI = Multi-Electrical Interface (RS-232/422/485)

## Features/Benefits

- > Easily network-enable serial devices
- > Internal v.90 and v.92 modem
- > PPP for creating IP network over serial connection
- > Static and RIP1 routing
- > Switch selectable  
RS-232/422/485 for simple interfacing to any type of serial device
- > Patented Digi RealPort® technology for COM or TTY port control and management
- > PPP and SSH for creating secure IP network over serial connection
- > Easy IP assignment via DHCP, RARP, ARP-Ping or Digi Port Authority-Remote application (included)

## Overview

The PortServer TS M MEI Modem Series allows users to create connections from serial devices to Ethernet networks and over standard phone lines. It combines the inherent benefits of data networking with proven asynchronous connectivity to deliver powerful yet simple Ethernet connectivity for any serial device.

PortServer TS M MEI is ideal for facilities that need local serial-to-Ethernet connectivity, with the added ability to establish a PPP link using a dial-up connection. The modem extends TCP/IP communications over a standard phone line, which creates a backup connection in case the primary Ethernet connection fails. This remote dial-up functionality allows users from a central location to maintain access to remote serial devices at all times. Other applications include remote site console management for small branches and remote log-in via a TCP/IP network for easy troubleshooting, monitoring, configuration or control.

As with all of Digi's device server solutions, PortServer TS M MEI delivers universal, high-performance multiport serial-to-Ethernet connectivity and is ideal for applications requiring COM ports, serial tunneling, or where TCP Socket, UDP Socket, or UDP Multicast functionality is needed. Patented RealPort technology makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

Digi International, the leader in Connectware, makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



Connectware™

# Features/Specifications

## FEATURES

- 10/100Base-T Ethernet support
- RJ-45 modem serial port connection
- RS-232/422/485 RJ-45 switch selectable serial port(s)
- Baud rates up to 230 Kbps (serial ports)
- Internal v.90/v.92 modem
- Full modem and hardware flow control
- DHCP/RARP/ARP-Ping for IP Address assignment
- Low latency
- TCP/UDP Socket Services
- UDP Multicast
- Telnet and Reverse Telnet
- Patented RealPort technology for COM and TTY ports
- RFC 2217
- PPP
- Static routing
- RIP 1
- SSH v2
- Port buffering
- ModbusTCP protocol conversion
- HTTP
- SNMP v1 (read/write)
- Digi Port Authority – Remote management diagnostics and auto-discovery tool
- LED status for link and power
- RJ-45/DB-9F crossover cable included for configuration

## OPERATING SYSTEMS

- AIX
- HP-UX
- Linux
- Windows® XP
- Windows Server™ 2003
- Windows 2000
- Windows NT®
- Windows 98/ME
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)
- TCP/UDP Socket Services are operating system independent

## REGULATORY APPROVALS

- FCC Part 15 Subpart B, Class B
- EN55022, Class B
- EN61000-3-2, 3
- EN55024
- UL60950
- CAN/CSA C22.2 No. 60950
- EN60950

## ENVIRONMENTAL




- Ambient temperature: 0° C to 50° C (32° F to 122° F)
- Relative humidity: 5% to 90% (non-condensing)

## POWER REQUIREMENTS


- Ships with 100/240VAC at 12VDC @ 1.0 Amps max
- 9-30VDC @ 525mAmp

## DIMENSIONS

- Length: 5.42 in (13.31 cm)
- Width: 3.33 in (8.46 cm)
- Depth: 0.952 in (2.42 cm)
- Weight: 2.25 oz (64 g)

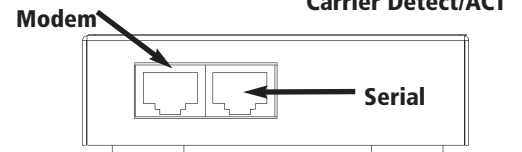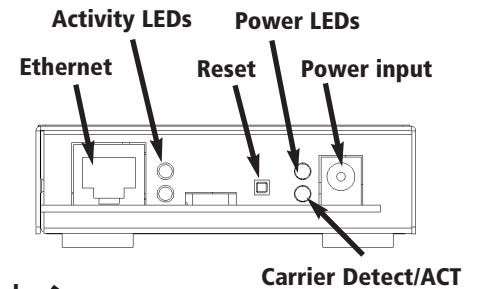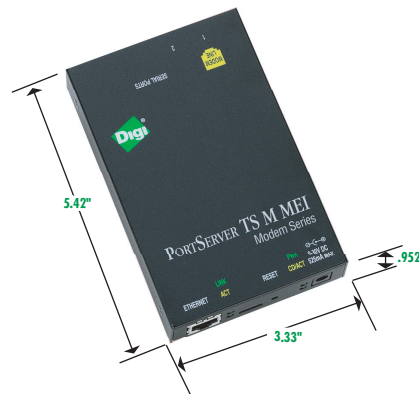

PortServer TS 1 M MEI

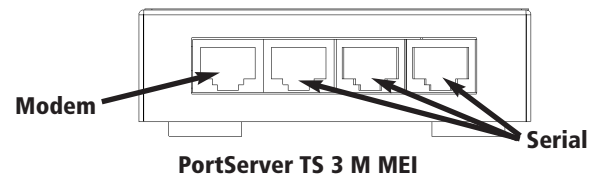

PortServer TS 3 M MEI

## MODEL.....PART NUMBERS

Model	North America	International
PortServer TS 1 M MEI	70001898	70001985
PortServer TS 3 M MEI	70001899	70001986

## DIGI SERVICE AND SUPPORT

You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. <http://support.digi.com>

**Digi International**  
11001 Bren Road E.  
Minnetonka, MN 55343 USA  
PH: 877-912-3444  
952-912-3444  
FX: 952-912-4952  
Email: [info@digi.com](mailto:info@digi.com)  
[www.digi.com](http://www.digi.com)

**Digi International GmbH**  
Joseph-von-Fraunhofer Str. 23  
D-44227 Dortmund  
Germany  
PH: +49-231-9747-0  
FX: +49-231-9747-111  
[www.digi.de](http://www.digi.de)

**Digi International (HK) Limited**  
Suite 1703-05, 17/F.,  
K Wah Centre  
191 Java Road  
North Point, Hong Kong  
PH: +852-2833-1008  
FX: +852-2572-9989  
[www.digi.cn](http://www.digi.cn)

[www.digi.com](http://www.digi.com)  
email:  
[info@digi.com](mailto:info@digi.com)

91001260  
B1/1104



Connectware™