


Professional Security Cameras Smart Scan Mini Dome EL-SSMDC48x-3



Benefits & Features

- Sony 1/3" Super HAD CCD
- High Resolution Color Camera (480 TV Lines)
- Built in Stable Pan/Tilt Mechanism
- 0 - 350° Pan/5 - 90° Tilt
- Built in 3.6mm Fixed Board Lens
- 3X Digital Zoom & On Screen Display
- 255ID/64PST/4 Auto Scan/4 Tour
- Stylish Design & Clear Dome Housing
- RS-485 Communication with Multi-Protocol built in
- Easy Installation and Operation
- 12VDC Power

Dimension Drawings

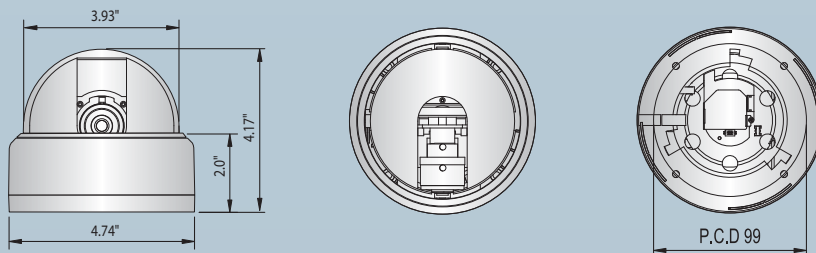

Optional Accessories

Controllers

EL-2000J & EL-2000 Mini

Features

- RS-485 Communications (Max. 1.2Km)
- High Speed Dome/Smart Scan (I/II) Dome Camera Control
- AF Box Zoom/AF Zoom Dome/Zoom Enviro Camera Control
- 99 ETM DVR Control
- Slave Controller Extendable
- Built-In Joystick for easy Control of Zoom In/Out. Pan/Tilt
- Multi-Protocol Built-In (Standard/PD/DN etc.)
- 12VDC 500mA Via Junction Box (STD Accessory)



Specifications

Camera Model	EL-SSMDC48x-3
Protocol	Multi-Protocol(STD/PD, DN, SD etc)
Image Sensor	1/3" Sony Exview HAD CCD
Picture Elements	NTSC : 410K, PAL : 470K
White Balance	Auto. White Balance(AWB)
Scanning System	525Lines(NTSC), 625Lines(PAL) 2 : 12 Interlace
Sync.System	2 : 1 Internal
Scanning Frequency	(H)15.73KHz(v) 59.94Hz(NTSC), (H)15.625KHz(V) 50Hz(PA)
Horizontal Resolution	480TV Lines
S/N Ratio	48dB(AGC Off)
Gamma Correction	0.45 or 1(Selectable)
Video Output Signal	VBS 1.0Vp-p Composite
Minimum Illumination	0.05Lux F1.2
Digital Zoom	X3
AGC	Available
Back Light Compensation	Built-in(Auto)
Auto. Electrical Shutter	1/60 -10,000(NTSC), 1/50 -10,000(PAL)
Lens Type(STD)	3.6mm Fixed Board Lens
Operating Temperature	14F- 122F (10° - +50° C)
Humidity	Within 90% RH
Video Output Terminal	BNC Connector
Power	12 VDC
Dimension	5.51(W) x 3.74 (H) 140mm(W) x 95mm(H)
Weight	575g 1.27lbs
Pan Tilt & Zoom Control	
Control	RS-485/422 Baud rate : 9600bps
Protocol	Multi-Protocol (STD/PD)
On Screen Display	Available