

HP LaserJet Enterprise M609 series



The pinnacle of performance and security.

This HP LaserJet Printer with JetIntelligence combines exceptional performance and energy efficiency with professional-quality documents right when you need them – all while protecting your network from attacks with the industry's deepest security¹



HP LaserJet Enterprise M609dn



HP LaserJet Enterprise M609x



Color touchscreen



Mobile printing



Low energy



Instant-on technology



Auto on/off



2-sided printing

The world's most secure printing¹

- With HP Sure Start, each printer regularly checks its operating code and repairs itself from attempted hacks.
- Whitelisting checks firmware during startup to help ensure it's authentic, good code – digitally signed by HP.
- Run-time intrusion detection continually monitors activity to detect and stop attacks, then automatically reboots.
- Centralise control of your printing environment with HP Web Jetadmin – and help build business efficiency.²

High-speed performance meets energy efficiency

- Speed through tasks and save paper. Print two-sided documents nearly as fast as one-sided.
- This printer wakes up fast and prints your first page faster – in as quickly as 7.9 seconds.³
- This printer uses exceptionally low amounts of energy thanks to its innovative design and toner technology.⁴


More. Pages, Performance, and Protection.⁵

- Produce sharp text, bold blacks, and crisp graphics with precision black toner.
- Original HP Toner cartridges with JetIntelligence deliver more pages per cartridge than predecessors.⁵
- Help retain the Original HP quality you paid for with anti-fraud and cartridge authentication technology.
- Spend less time replacing toner, and more on business. Choose high-yield toner cartridges.⁶

Product walkaround

HP LaserJet Enterprise M609x shown

- 1. Hardware Integration Pocket
- 2. 10.9 cm colour touchscreen control panel
- 3. Easy-access USB port
- 4. 100-sheet multipurpose tray 1
- 5. Front door access to toner cartridges
- 6. 550-sheet input tray 2
- 7. 550-sheet input tray 3
- 8. 500-sheet output bin
- 9. Automatic two-sided printing
- 10. Wi-Fi Direct/Bluetooth Low Energy
- 11. Host USB port
- 12. Gigabit Ethernet network port
- 13. Hi-Speed USB 2.0 printing port
- 14. Slot for cable-type security lock

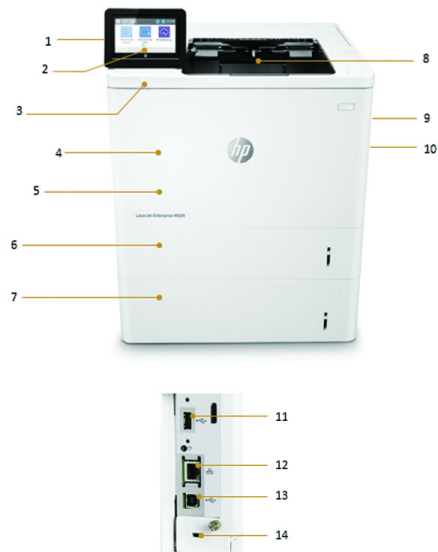

Series at a glance



Model	HP LaserJet Enterprise M609dn	HP LaserJet Enterprise M609x
Product number	K0Q21A	K0Q22A
Print speeds (A4)	Up to 71 ppm	
Control panel	6.9 cm LCD with keypad	10.9 cm colour touchscreen
Automatic two-sided printing	Yes	
Hardware Integration Pocket	Yes	
100-sheet tray 1, 550-sheet tray 2	Yes	
550-sheet paper feeder	Optional (up to four)	Yes (plus up to three optional)
2,100-sheet paper feeder	Optional	
Envelope feeder	Optional (up to two)	
Printer stand	Optional	
5-bin stapler/stacker/mailbox with job offset	Optional	
Direct mobile printing	Optional wireless direct/NFC	Embedded Wi-Fi Direct/Bluetooth Low Energy
Wireless networking	Optional	Embedded
HP High-Performance Secure Hard Disk	Optional	

Accessories, Supplies and Support

Supplies	CF237A HP 37A Black Original LaserJet Toner Cartridge (11,000 pages)
	CF237X HP 37X High Yield Black Original LaserJet Toner Cartridge (25,000 pages)
	CF237Y HP 37Y Extra High Yield Black Original LaserJet Toner Cartridge (41,000 pages)
	LOH25A HP LaserJet Z20V Maintenance Kit (Up to 225,000 pages)
Accessories	B5L28A HP Internal USB Ports
	LOH17A HP LaserJet 550-sheet Paper Tray
	LOH18A HP LaserJet 2100 Sheet Paper Tray
	LOH19A HP LaserJet Printer Stand
	LOH20A HP LaserJet Stapler/Stacker/Mailbox
	LOH21A HP LaserJet Envelope Feeder
	LOH22A HP LaserJet Extension Tray Cover
	B5L29A HP High-Performance Secure Hard Disk
	J8030A HP Jetdirect 3000w NFC/Wireless Accessory
	J8031A HP Jetdirect 2900nw Print Server
Service and Support	U9MZ0E HP 3 year Next Business Day Hardware Support with Defective Media Retention for LaserJet Enterprise M609 U9MZ1E HP 4 year Next Business Day Hardware Support with Defective Media Retention for LaserJet Enterprise M609 U9MZ2E HP 5 year Next Business Day Hardware Support with Defective Media Retention for LaserJet Enterprise M609 U9NB4PE HP 1 year Post Warranty Next Business Day Hardware Support with Defective Media Retention for LaserJet Enterprise M609 U9NB5PE HP 2 year Post Warranty Net Business Day Hardware Support with Defective Media Retention for LaserJet Enterprise M609

Technical specifications

Model	HP LaserJet Enterprise M609dn	HP LaserJet Enterprise M609x
Product number	K0Q21A	K0Q22A
Functions	Print	
Control panel	Rotating 6.86 cm (2.7 in) QVGA LCD (colour graphics) with 24 key pad.	10.92 cm (4.3 in) Colour Graphics Display (CGD) with touchscreen, rotating (adjustable angle) display, home button
Print		
Print technology	Laser	
Print speed ¹	Black (A4, normal) Up to 71 ppm; Black (A4, duplex) Up to 58 ppm;	
First page out ²	Black (A4, ready) : As fast as 5.4 sec; Black (A4, sleep) : As fast as 7.9 sec;	
Print resolution	Black (best) : Up to 1200 x 1200 dpi; Technology : FastRes 1200; 1200 x 1200 dpi;	
Monthly duty cycle	Up to 300,000 pages A4; Recommended monthly page volume : 5,000 to 30,000	
Printer smart software features	Print preview, duplex printing, print multiple pages per sheet (2, 4, 6, 9, 16), collation, watermarks, store print jobs, easy-access USB	
Standard print languages	HP PCL 6, HP PCL 5 (HP PCL 5 driver available from the Web only), HP postscript level 3 emulation, native PDF printing (v 1.7), Apple AirPrint™	
Fonts and typefaces	105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal Windows Vista 8 Fonts (Calibri, Cambria); Additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at http://www.hp.com/go/laserjetfonts	
Print area	Print margins Top: 4.3 mm, Bottom: 4.3 mm, Left: 4.3 mm, Right: 4.3 mm; Maximum print area:	
Duplex printing	Automatic (standard)	

Model	HP LaserJet Enterprise M609dn	HP LaserJet Enterprise M609x
Product number	K0Q21A	K0Q22A
Processor speed	1.2 GHz	
Connectivity		
Standard	1 Hi-Speed USB 2.0 Device; 2 Hi-Speed USB 2.0 Host; 1 Gigabit Ethernet 10/100/1000T network; 1 Hardware Integration Pocket	1 Hi-Speed Device USB 2.0; 2 Hi-Speed USB 2.0 Host; 1 Gigabit/Fast Ethernet 10/100/1000 Base-TX network; Hardware Integration Pocket; 1 Wi-Fi direct 802.11b/g/n; 1 Bluetooth low energy I/O
Optional	HP Jetdirect 2900nw Print Server J8031A; HP Jetdirect 3000w NFC/Wireless Accessory J8030A	
Mobile printing capability ³	HP ePrint; Apple AirPrint™; Mopria-certified	HP ePrint; Wireless direct printing; Apple AirPrint™; Mopria-certified
Supported network protocols	Via built-in networking solution: TCP/IP, IPv4, IPv6; Print: TCP-IP port 9100 Direct Mode, LPD (raw queue support only), Web Services Printing, IPP 2.0, Apple AirPrint™, HP ePrint, FTP Print, Google Cloud Print; DISCOVERY: SLP, Bonjour, Web Services Discovery; IP CONFIG: IPv4 (BootP, DHCP, AutoIP, Manual, TFTP Config, ARP-Ping, IPv6 (Stateless Link-Local and via Router, Statefull via DHCPv6); Management: SNMPv2/v3, HTTP/HTTPS, Telnet, TFTP Config, FTP FW Download, Syslog; Security: SNMPv3, SSL Cert Management, Firewall, ACL, 802.1x	
Hard disk	Optional, 500 GB (with accessory B5L29A)	
Memory	Standard: 512 MB; Maximum: 1.5 GB, MAX memory, when 1GB Accessory DIMM is installed	
Media handling		
Number of paper trays	Standard: 2 ; Maximum: Up to 6	Standard: 3 ; Maximum: Up to 6
Media types	Paper (plain, light, bond, recycled, heavy, extra heavy, cardstock, pre-printed, pre-punched, colored, rough, heavy rough), monochrome transparency, labels, letterhead, envelope, heavy envelope	
Media size	Custom (metric): Feeder 1: 76 x 127 to 216 x 356 mm; Feeder 2: 99 x 148 to 216 x 356 mm ; Supported (metric): Feeder 1: A4, A5, A6, RA4, B5 (JIS), B6 (JIS), 10 x 15 cm, Oficio (216 x 340 mm), 16K, envelopes (C5, B5, C6, DL ISO), Postcard (JIS single and double); Feeder 2: A4, A5, A5-R, B5 (JIS), 16K	Custom (metric): Feeder 1: 76 x 127 to 216 x 356 mm; Feeder 2: 99 x 148 to 216 x 356 mm; Feeder 3: 99 x 148 to 216 x 356 mm ; Supported (metric): Feeder 1: A4, A5, A6, RA4, B5 (JIS), B6 (JIS), 10 x 15 cm, Oficio (216 x 340 mm), 16K, envelopes (C5, B5, C6, DL ISO), Postcard (JIS single and double); Feeder 2: A4, A5, A5-R, B5 (JIS), 16K; feeder 3: A4, A5, A5-R, B5 (JIS), 16K
Media handling	Standard input: 100-sheet multipurpose feeder, 550-sheet input feeder Standard output: 500 sheet output bin Optional input: Optional 1 x 550-sheet paper feeder, optional 1 x 550 paper feeder and stand with cabinet, optional 3 x 550-sheet paper feeder and stand, optional high-capacity paper feeder and stand with 1 x 550 sheet feeder and 1 x 2,000-sheet feeder	Standard input: 100-sheet multipurpose feeder, 550-sheet input feeder, 550 accessory feeder Standard output: 500 sheet output bin Optional input: Optional 1 x 550-sheet paper feeder, optional 1 x 550 paper feeder and stand with cabinet, optional 3 x 550-sheet paper feeder and stand, optional high-capacity paper feeder and stand with 1 x 550 sheet feeder and 1 x 2,000-sheet feeder
Media weight	Feeder 1: 60 to 199 g/m²; Feeder 2: 60 to 120 g/m²;	Feeder 1: 60 to 199 g/m²; Feeder 2, 3: 60 to 120 g/m²;
Input capacity	Maximum: Up to 4,400 sheets	

Model	HP LaserJet Enterprise M609dn		HP LaserJet Enterprise M609x
Product number	K0Q21A		K0Q22A
Output capacity	Standard: Up to 500 sheets Envelopes: Up to 75 envelopes Transparencies: 200 Maximum: Up to 1,300 sheets		
Compatible operating systems	Android, Linux Boss (5.0), Linux Debian (7.0, 7.1, 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, 7.8, 7.9, 8.0, 8.1, 8.2, 8.3, 8.4, 8.5, 8.6), Linux Fedora (22, 23, 24), Linux Mint (17, 17.1, 17.2, 17.3, 18), Linux Red Hat Enterprise (6.0, 7.0), Linux SUSE (13.2, 42.1), Linux Ubuntu (12.04, 14.04, 15.10, 16.04, 16.10), OS macOS 10.12 Sierra, OS X 10.11 El Capitan, OS X 10.10 Yosemite, UNIX, Windows 10 all 32/64-bit editions (excluding RT OS for Tablets), Windows 7 all 32/64-bit editions, Windows 8/8.1 all 32/64-bit editions (excluding RT OS for Tablets), Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc.), Windows XP SP3 32-bit editions (XP Home, XP Pro, etc.)		
Compatible network operating systems	Citrix MetaFrame Presentation Server 3.0, Citrix MetaFrame XP Presentation Server (Feature Release 1, 2, and 3), Citrix on Windows Server 2003/2003 R2, Citrix on Windows Server 2008/2008 R2/2008 R2 SP1, Citrix on Windows Server 2012/2012 R2, Citrix Presentation Server 4.0/4.5, Citrix XenApp 5.0 (Plus Feature Pack 2 & 3) for Windows Server 2008 Terminal Services 32/64-bit, Citrix XenApp 6.0/6.5 (for Windows Server 2008 R2 Terminal Services, 32/64-bit), Citrix XenApp 6.0/6.5/7.5 (for Windows Server 2008 R2 SP1 Terminal Services, 32/64-bit), Citrix XenApp 7.5 (for Windows Server 2012 and 2012 R2 Terminal Services, 64-bit), Citrix XenDesktop 5.6 (for Windows Server 2008 R2 Terminal Services, 32/64-bit), Citrix XenDesktop 5.6/7.0/7.5 (for Windows Server 2008 R2 SP1 Terminal Services, 32/64-bit), Citrix XenDesktop 7.0/7.5 (for Windows Server 2012 and 2012 R2 Terminal Services, 64-bit), Novell NetWare 6.5/SP8 Novell Clients http://www.novell.com/iprint , Novell iPrint Appliance v1.0, Novell Open Enterprise Server 11/SP1, Novell Open Enterprise Server 2 for Linux, Novell Servers http://www.novell.com/iprint , Windows Server 2003/2003 R2 32/64-bit (SP1/SP2) Standard/Enterprise/Datacenter (+ Cluster & Terminal Services), Windows Server 2003/2003 R2 32-bit (SP1/SP2), Standard/Enterprise (+ Cluster & Terminal Services), Windows Server 2008 32/64-bit (SP2) Standard/Enterprise (+ Cluster & Terminal Services), Windows Server 2008 R2 64-bit (SP1) Standard/Enterprise (+ Cluster & Terminal Services), Windows Server 2008/2008 R2 32/64-bit (SP1/SP2) Standard/Enterprise/Datacenter (+ Cluster & Terminal Services), Windows Server 2012/2012 R2 64-bit Standard/Foundation/Essentials/Datacenter (+ Cluster & Terminal Services)		
Minimum system requirements	Windows: 2 GB available hard disk space; OS hardware requirements see http://www.microsoft.com ; Mac: 1.3 GB available hard drive space; Internet; OS hardware requirements see http://www.apple.com for more info		
Software included	HP Connected, HP Device Experience (DXP), HP PCL 6 (XPS) Printer Driver, HP Software Installer/Uninstaller, Mac OS Welcome Screen (Directs users to http://www.123.hp.com or OS App Source for printer software), online user manuals		
Security management	Identity management: Kerberos authentication; LDAP authentication; 1000 user PIN codes; optional HP and 3rd party advanced authentication solutions (e.g., badge readers); Network: IPsec/firewall with Certificate; Pre-Shared Key, and Kerberos authentication; Supports WJA-10 IPsec configuration Plug-in; 802.1X authentication (EAP-PEAP; EAP-TLS); SNMPv3; HTTPS; Certificates; Access Control List; Data: Storage Encryption; Encrypted PDF & Email (uses FIPS 140 validated cryptographic libraries from Microsoft); Secure Erase; SSL/TLS (HTTPS); Encrypted Credentials; Device: Security lock slot; USB port disablement; Hardware integration pocket for security solutions; Intrusion Detection with Red Balloon Security Technology - Constant in-device monitoring for attacks; SureStart Secure Boot - BIOS Integrity Checking with self-healing capability; Whitelisting - loads only known good code (DLLs, EXEs, ...); Security management: Compatible with HP JetAdvantage Security Manager, Device Security Syslog Messages processed and accessible in Arcsight and Splunk SIEMs		
Printer management	HP JetAdvantage Security Manager; HP SNMP Proxy Agent; HP Web JetAdmin Software; HP WS Pro Proxy Agent; Printer Administrator Resource Kit for HP Universal Print Driver		
Dimensions and weight			
Printer dimensions (W x D x H)	Minimum 431 x 466 x 380 mm; Maximum: 431 x 1040 x 453 mm;		Minimum 431 x 466 x 505 mm; Maximum: 431 x 1100 x 581 mm;
Package dimensions (W x D x H)	597 x 497 x 539 mm		762 x 593 x 511 mm
Printer weight	21.6 kg		26.3 kg
Package weight	27.2 kg		33.80 kg
Operating environment	Temperature: 15 to 32.5°C; Humidity: 10 to 90% RH		
Storage conditions	Temperature: -20 to 40°C; Humidity: 10 to 80% RH		
Acoustics	Acoustic power emissions: 7.1 B(A); Acoustic pressure emissions: 56 dB(A) Acoustic power emissions: 7.0 B(A); Acoustic pressure emissions: 55 dB(A)		
Power ⁴	Requirements: 220V - 240V nominal; +/-10% (min 198V, Max 264V); 50 - 60Hz nominal +/- 3Hz (min 47Hz, max 63Hz); 6 A; Consumption: 780 watts (printing), 15.3 watts (ready), 3.1 watts (sleep), < 0.1 watts (Auto Off/Manual On), < 0.1 watts (Manual Off); Typical Electricity Consumption (TEC)⁷: Energy Star: 3.173 kWh/week; Blue Angel: 2.948 kWh/week; Power supply type: Built in 220V Power Supply;		
Energy savings feature technology	HP Auto-On/Auto-Off Technology; Instant-on Technology		
Certifications ⁶	CISPR 22:2008 (International) - Class A, EN 55022:2010 (EU) - Class A, EN 61000-3-2:2006 +A1:2009 +A2:2009, EN 61000-3-3:2008, EN 55024:2010, EMC Directive 2004/108/EC; Other EMC approvals as required by individual countries ENERGY STAR [®] qualified Blue Angel compliant Yes, Blue Angel DE-UZ 205—only ensured when using Original HP supplies		
What's in the box ⁵	HP LaserJet Enterprise M609dn Printer; HP Black Original LaserJet Toner Cartridge (11,000 yield); CD with software drivers and documentation; Documentation (hardware install guide); Power cord	HP LaserJet Enterprise M609x Printer; HP Black Original LaserJet Toner Cartridge (11,000 yield); CD with software drivers and documentation; Documentation (hardware install guide); Power cord	
Warranty	One-year, next-business day, onsite warranty. Warranty and support options vary by product, country and local legal requirements. Go to http://www.hp.com/support to learn about HP award winning service and support options in your region.		

Footnotes

- ¹ Based on HP review of 2016 published security features of competitive in-class printers. Only HP offers a combination of security features that can monitor to detect and automatically stop an attack then self-validate software integrity in a reboot. For a list of printers, visit <http://www.hp.com/go/PrintersThatProtect>. For more information: <http://www.hp.com/go/printersecurityclaims>.
- ² HP Web Jetadmin is available for download at no additional charge at hp.com/go/webjetadmin.
- ³ Measured after 15 min in sleep. Exact speed varies depending on the system configuration, software application, driver, document complexity and time in sleep.
- ⁴ Based on HP testing using the ENERGY STAR® programme's Typical Electricity Consumption (TEC) method or as reported in energystar.gov versus the top three leading competitors as of 8/2015. Actual results may vary. For details see <http://www.hp.com/go/Ljclaims>.
- ⁵ More pages versus predecessor cartridges claim based on page-yield comparison of HP 37X High Yield Black Original LaserJet Toner Cartridges with HP 87X High Yield Black Original LaserJet Toner Cartridges. For more information, see <http://www.hp.com/go/learnaboutsupplies>.
- ⁶ HP 37X High Yield Black Original LaserJet Toner Cartridges not included; please purchase separately.
- ⁷ Measured using ISO/IEC 24734, excludes first set of test documents. For more information, see <http://www.hp.com/go/printerclaims>. Exact speed varies depending on the system configuration, software application, driver, and document complexity.
- ⁸ An FCC Class A emissions compliant device meets the less stringent (higher) levels of emissions allowed by the FCC for a product operation in a commercial environment. An FCC class A device cannot be marketed for use in a residential environment and an FCC class A device should not be purchased for use in a residential environment due to the increased risk of interference to radio communications.

Technical specifications disclaimers

- ¹ Measured using ISO/IEC 24734, excludes first set of test documents. For more information see <http://www.hp.com/go/printerclaims>. Exact speed varies depending on the system configuration, software application, driver, and document complexity.
- ² Measured using ISO/IEC 17629. For more information see <http://www.hp.com/go/printerclaims>. Exact speed varies depending on the system configuration, software application, driver, and document complexity.
- ³ May require a firmware upgrade to be compatible, download at <http://www.hp.com/go/support>
- ⁴ Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the product warranty.
- ⁵ Cartridges included, yields 11,000 black pages based on ISO/IEC 19798 and continuous printing. Actual yields vary considerably based on images printed and other factors. For details see <http://www.hp.com/go/learnaboutsupplies>
- ⁶ EPEAT® registered where applicable. EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country.
- ⁷ Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the product warranty. Energy Star value typically based on measurement of 115 V device.
- ⁸ Measured using ISO 24734 Feature Test, A5 Landscape Feed. Speed may vary based on content, PC, media orientation, and media type.
- ⁹ Average colour composite (C/M/Y) and black declared yields based on ISO/IEC 19798 and continuous printing. Actual yields vary considerably based on images printed and other factors. For details see <http://www.hp.com/go/learnaboutsupplies>.
- ¹⁰ eMMC is non-volatile storage; Firmware encryption (AES 128 or AES 256) of customer/job data; Secure Cryptographic Erase – Job Data; Secure Erase – Disk
- ¹¹ Based on the BA TEC method with the following possible exceptions: 1 minute or less sleep delay setting, Wi-Fi disabled.



www.blauer-engel.de/uz205

Windows 10



<http://www.hp.com/uk>

The product could differ from the images shown. © Copyright 2018 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Published in EMEA 4AA6-9826, July 2019

