


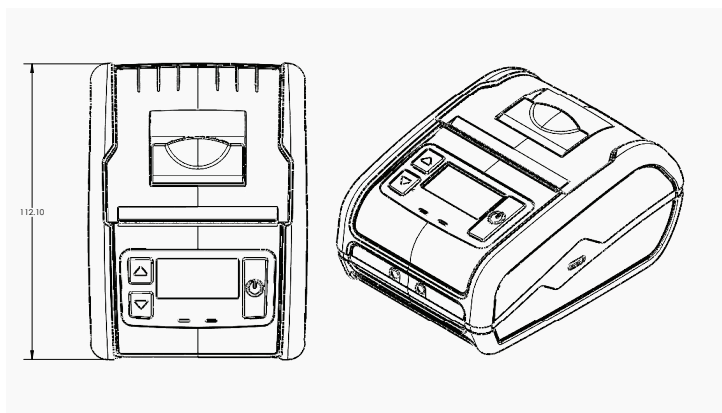


Mobile Printers

WPP-250

Is a new model in series of mobile printers. It is an **enhanced variant** of DPP-250 and **offers Bluetooth and Wi-Fi communication**. A nice **OLED display** is added for easier operation.

Key Features

- Device Agnostic
- Compact and light weight design
- Industry Standard Printer Language
- Robust body design
- Page Mode
- Downloadable Graphics

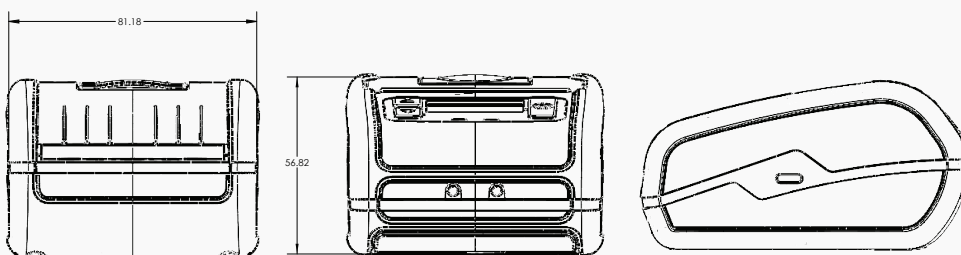

Electrical

Display	OLED
LED Indicator	Charging, Status
Battery	3.7V, 2100mAh (Replaceable, Rechargeable Li-ion battery)
Connectivity	USB, Bluetooth BLE, Wireless LAN

Mechanical

Compatibility	Apple® iOS, Android™, Microsoft® Windows®
Dimensions (LxWxD)	3.25" x 4.41" x 2.26"
Weight	0.57 lbs.
Buttons	Power, Page Up, Page Down
Drop Rating	1.5 m
Water and Dust resistant	IP54
Port	USB-C

Printing

Printing Width	2"
Print Method	Direct Thermal
Print Speed	50mm/sec
Print Width	48mm (384 dots per line)
Resolution	203 dpi (8x8 dots/mm)
Logo Registration	One black and white image (384 x 248 dots)
Resident Fonts	A: 12 x 24 dots (32 char per line) B: 9 x 16 dots (42 char per line)
Character Set	Katakana, PC437/850/852/857/858/863/865/866/860/862/864/737 WPC1252/1252_2/1254/1250/1251/CP1253
Resident Barcodes	1D: UPC-A/E, JAN13/8, CODE39/93, ITF, CODABAR, CODE128 GS1 Databar Omni-directional, Truncated, Limited, Stacked, Stacked Omni-directional 2D: QR, MicroQR, MaxiCode, MicroPDF417, PDF417, DataMatrix
Paper Type	Thermal Receipt / Thermal Label
Reliability	Thermal head: 50 km/31 miles Printing ratio: 12.5% maximum

Enviromental

Operating Enviroment	
Temperature	+5°C to +35°(41°F to +95°F)
Humidity	20% to 80%
Storage Enviroment	
Temperature	-20°C to +60°C (-4°F to +140°F)
Humidity	10% to 90%

Certifications

Regulatory	VCCI/CE/FCC Class-B
------------	---------------------