

NERLITE® NL-200 SERIES



Lighting Controller For Any NERLITE

Controls any NERLITE lighting product easily and remotely using an online website interface. The NL-200 Series simplifies connectivity and includes the power regulation, intensity control, timing and triggering functions needed for successful machine vision applications.

With optional Ethernet connectivity and resident web server, the NL-200 Series is a powerful accessory to complement any NERLITE light.

NL-200 Series: At a Glance

- Compatible with any standard NERLITE lighting product
- Controls in continuous, strobe or switched mode
- Provides self-diagnosed status
- Resident web server option
- Ethernet (TCP/IP, UDP) and manual panel control options
- DIN rail mounting included

MECHANICAL

Height: 4.4" (112 mm) **Width:** 3.82" (97 mm)
Depth: 2.44" (62 mm) **Weight:** 10.58 oz. (300 g)

ENVIRONMENTAL

Operating Temperature: 0° to 40° C (32° to 104° F)
Storage Temperature: 0° to 50° C (32° to 122° F)
Humidity: up to 95% (non-condensing)

COMMUNICATION PROTOCOLS

NL-200: Push button
NL-220, NL-220F: Ethernet, push button

INDICATORS: Alphanumeric digital display

ELECTRICAL

Power: 24-48 V
Current: From 0 mA to 20 A in steps of 5 mA. Up to 3 A per channel continuous or 20 A pulsed.

CONFIGURATIONS


NL-200: Manual panel interface
NL-220: Ethernet and manual panel interface. Normal speed: 20us pulse width minimum, 20 us delay minimum.
NL-220F: Ethernet and manual panel interface. Fast speed: 2us pulse width minimum, 2 us delay minimum.

For more information on this product, visit www.microscan.com.

©2011 Microscan Systems, Inc. SP067C 02/11
Warranty—One year limited warranty on parts and labor. Free extended 3 year warranty upon online product registration.



NL-220, NL-220F image processing software on web server

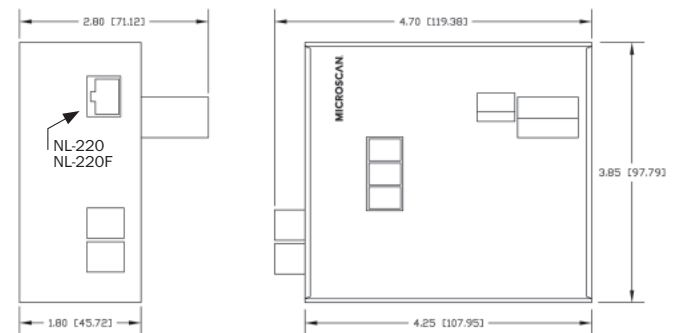

MICROSCAN®

Microscan Systems, Inc.
 Tel 425 226 5700 / 800 251 7711
 Fax 425 226 8250

Microscan Europe
 Tel 31 172 423360
 Fax 31 172 423366

Microscan Asia Pacific
 Tel 65 6846 1214
 Fax 65 6846 4641

www.microscan.com

Product Information:
info@microscan.com

Auto ID Support:
helpdesk@microscan.com

Vision Support:
visionsupport@microscan.com

NERLITE Support:
nerlitesupport@microscan.com