

VISION MINI SMART CAMERA

World's Smallest Vision System



The Vision MINI smart camera is designed specifically for reliable vision performance in embedded identification and inspection applications. As the world's smallest fully integrated vision system, the Vision MINI's ultra-compact size and wide angle optics provide the best performance available for machine vision tasks at close range.

With the Vision MINI, OEM design engineers can quickly implement robust inspection, color matching, symbol decoding, OCR and more in a single compact vision solution.

Vision MINI: At a Glance

- Ultra-compact shape and size
- Complete with processor, lens, illumination and AutoVISION software for easy integration into embedded applications
- Simultaneously inspect multiple part features
- Mono and color sensor options



AutoVISION Software (SXGA only): Provides a simple setup and run time interface for solving basic to mid-range vision applications.



Visionscape Software (QXGA, standard; SXGA, optional): Enables scripting and other advanced programming capabilities.



AutoVISION Button: Performs automatic focus, photometry, and training.



Visible Indicators: Shows inspection status and IO state at a glance.

For more information on this product, visit www.microscan.com.

Compact & Lightweight

The Vision MINI is the world's smallest fully integrated smart camera. Its compact size allows flexible positioning in tight spaces. The lightweight and durable magnesium alloy case weighs less than 2 oz.

Autofocus

The AutoVISION button provides one button set up of targeting and autofocus, and sets internal parameters to optimize image capture.

Reliability & Longevity

The Vision MINI delivers both high performance and reliability, along with the assurance of long term availability and support. This is essential for OEMs, who require uninterrupted availability throughout the lifecycle of their products, and enables them to focus on new development instead of obsolescence issues.

Powerful Capabilities

Features a robust tool set to address a wide range of automation challenges using vision technology. AutoVISION software provides an intuitive interface, step-by-step guides, and a library of presets that allow easy set up and deployment.

Scalable System

AutoVISION software allows easy expansion to more complex vision applications through migration to full Visionscape® software.

Application Examples

- Clinical instruments
 - Tube and cap absence and presence
 - Color detection and matching
- Electronics assembly
 - Fiducial location
- Pharmaceutical packaging
- Medical devices

Vision MINI: Capabilities




Plus Visionscape Option:

- 1D/2D symbol decoding
- Optical Character Recognition (OCR)
- Dynamic part location
- Assembly verification
- Dimensional measurements
- Image transformation and scaling
- Precision calibration
- Custom vision tools (scripting)


MICROSCAN®

VISION MINI SMART CAMERA SPECIFICATIONS AND OPTIONS

FRONT

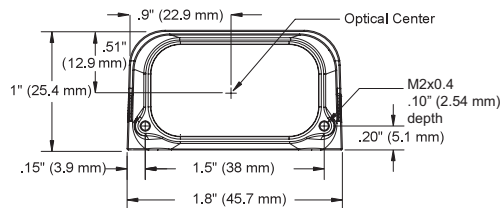


BASE

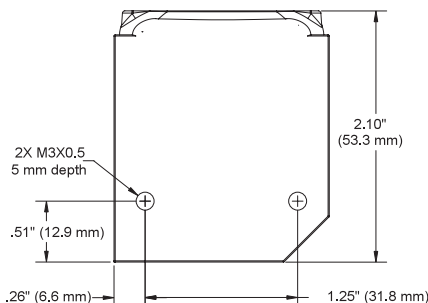


Note: Nominal dimensions shown. Typical tolerances apply.

FIELD OF VIEW AND WORKING DISTANCE

SXGA Vision MINI

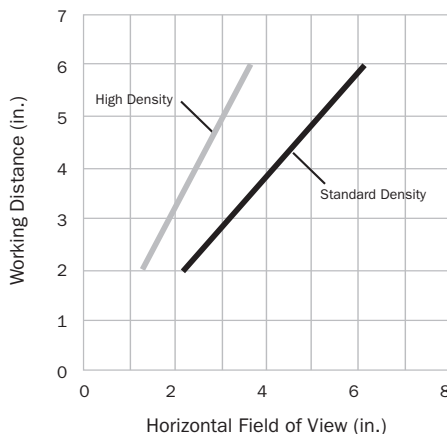

QXGA Vision MINI

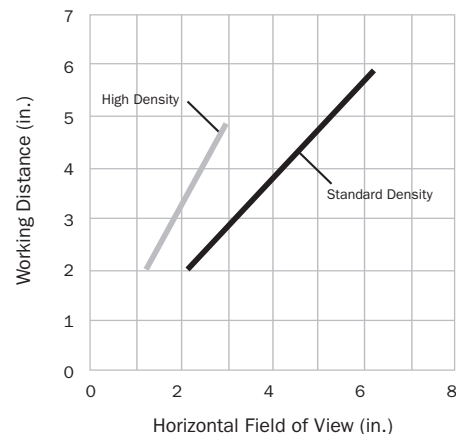

MECHANICAL

Height: 1" (25.4 mm) **Width:** 1.80" (45.7 mm)
Depth: 2.10" (53.3 mm) **Weight:** 2 oz. (57 g)

ENVIRONMENTAL

Enclosure: IP54 (category 2)
Humidity: up to 90% (non-condensing)
Operating Temperature: 0° to 40° C (32° to 104° F)
Storage Temperature: -50° to 75° C (-58° to 167° F)

CE MARK

General Immunity for Light Industry:
 EN 55024: 1998 ITE Immunity Standard
Radiated and Conducted Emissions of ITE Equipment: EN 55022:98 ITE Disturbances

LIGHT SOURCE

Type: High output LEDs



SYMBOLGY TYPES

2D Symbolgies: Data Matrix (ECC 0-200), QR Code, Micro QR Code, Aztec Code
Stacked Symbolgies: PDF417, Micro PDF417, GS1 Databar (Composite & Stacked)
Linear Barcodes: Code 39, Code 128, BC 412, I2 of 5, UPC/EAN, Codabar, Code 93, Pharmacode, PLANET, PostNet, Japanese Post, Australian Post, Royal Mail, Intelligent Mail, KIX

INDICATORS

LEDs: Trigger, Pass, Fail, Mode, Power, Link/Act
Green Flash: Pass
Blue V: Target locator

LIGHT COLLECTION OPTIONS

Progressive scan, square pixel.
Shutter: Software adjustable, 10 microseconds to 1/60 seconds
SXGA: 1280 x 1024 pixels
QXGA (Color): 2048 x 1536 pixels

SOFTWARE OPTIONS

SXGA: AutoVISION included, Visionscape upgrade available
QXGA (Color): Visionscape included

PIN ASSIGNMENTS

High Density 15 Pin D-sub Socket

Pin No.	Host RS-232	In/Out
1	Power +5 VDC	In
2	TxD	Out
3	RxD	In
4	Power/Signal Ground	
5	NC	
6	NC	Out
7	Output 1 TTL ^a	Out
8	Default configuration ^b	In
9	Trigger	In
10	NC	In
11	Output 3 TTL ^a	Out
12	Learn (NPN)	In
13	Chassis ground ^c	
14	Output 2 TTL ^a	Out
15	NC	

- a. Can sink 10 mA and source 10 mA.
 b. The default is activated by connecting pin 8 to ground pin 4.
 c. Chassis ground: Used to connect chassis body to earth ground only. Not to be used as power or signal return.

IMAGING PARAMETERS

Focal Range: 2 to 6" (50.8 to 152.4 mm) (autofocus)

CONNECTOR

Type: 3 ft. cable terminated with High Density 15-pin D-Sub socket connector and USB Type B connector

ELECTRICAL

Power: 5 VDC +/- 5 %, 200 mV p-p max. ripple, 554 mA @ 5 VDC (typ.)
Optional Int.: 10-28 V Accy


COMMUNICATION PROTOCOLS

Standard Interface: RS-232 and/or USB 2.0 (Ethernet Emulation)

DISCRETE I/O

Trigger Input: 5 to 28 vdc rated (.16 mA)
Learn: 5 to 28 vdc rated (.16 mA)
Outputs (1, 2, 3): 5V TTL compatible, can sink 10 mA and source 10mA
Optional I/O: Optoisolated (with IC-332 accessory)

USB Type B Socket



No.	Function
1	Vbus (5V)
2	D-
3	D+
4	Ground

SAFETY CERTIFICATIONS DESIGNED FOR FCC, UL/cUL, CE, CB

ROHS/WEEE COMPLIANT

ISO CERTIFICATION

Certified ISO 9001:2008 Quality Management System

©2011 Microscan Systems, Inc. SP071C 09/11
 Performance data is determined using high quality Grade A symbols per ISO/IEC 15415 and ISO/IEC 15416 in a 25° C environment. For application-specific results, testing should be performed with symbols used in the actual application. Microscan Applications Engineering is available to assist with evaluations. Results may vary depending on symbol quality. **Warranty**—One year limited warranty on parts and labor. Free extended three year warranty available with online product registration.

MICROSCAN®

Microscan Systems Inc.

Tel 425 226 5700 / 800 251 7711
 Fax 425 226 8250

Microscan Europe

Tel 31 172 423360 / Fax 31 172 423366

Microscan Asia Pacific

Tel 65 6846 1214 / Fax 65 6846 4641

www.microscan.com

Product Information: info@microscan.com
 Technical Support: helpdesk@microscan.com