


OPR 3004

Rugged Handheld Long Range Laser Scanner

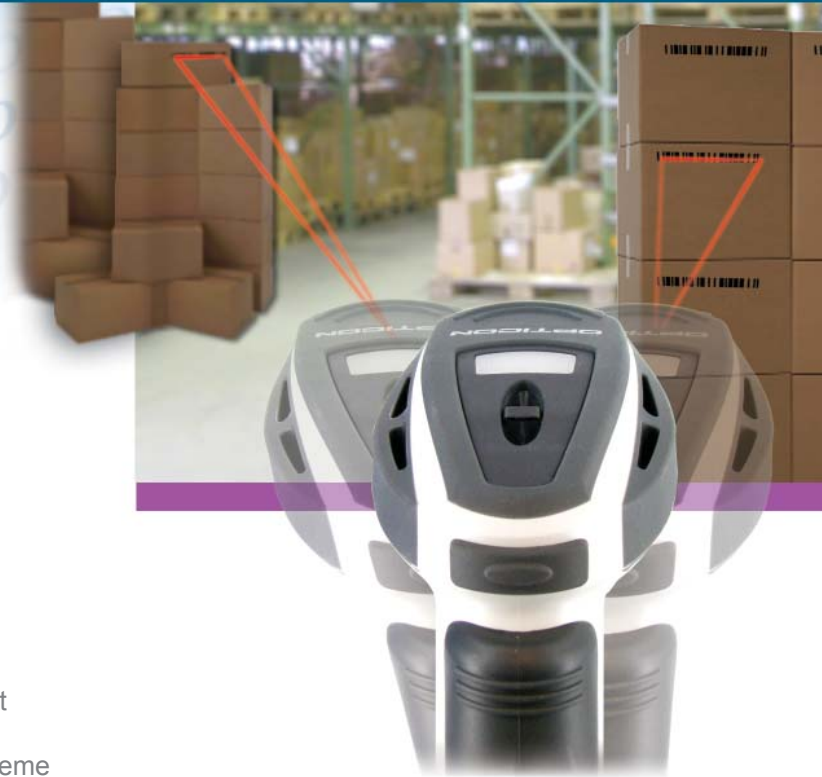

The rugged OPR-3004 is an ergonomic yet light-weight hand-held scanner that scans at far or high distances, delivering reliability and durability in harsh, dirty or extreme conditions.

Product Features

Long Range Scanner

OPR 3004 scanners are high performance devices for scan intensive applications that includes scanning at far or high distances. The integrated long range scan engine reads distances from 60 cm to 2.8 meter.

Rugged for Demanding Environments

The OPR 3004 is sealed in a rugged housing to IP54 standards that holds up well in environments where water and dust resistance is required. The scanner withstands multiple drops up to 2 meters (6.5 feet) onto concrete and features a trigger guard to prevent accidental scans, yet the ergonomic grip provides the user comfort when handling this lightweight scanner.

Good Read Indicator

A large and bright LED along with an adjustable tone provides a clear visible and audible good-read indication especially when operating in low-light or noisy environments.

Specifications

OPR 3004 Rugged Handheld Long Range Laser Scanner

Electrical specifications

Voltage requirement: 5 V ± 10 % (Keyboard Wedge and USB), 6 V ± 10 % (RS232)

Current consumption: max. 130 mA (RS232), max. 125 mA (Keyboard Wedge and USB)

Optical specifications

Light source: 650 nm visible laser diode

Scan method: Bi-directional scanning

Scan rate: 100 scans/sec

Reading pitch angle: -20 to 0°, 0 to +20°

Reading skew angle: -55 to -10°, +10 to +55°

Reading tilt angle: -5° to 0°, 0 to +5°

Curvature: R>15 mm (EAN8), R>20 mm (EAN13)

Reading width: depending on reading distance and barcode label resolution

Min. PCS value: 0.45

Depth of field: at PCS 0.9, Code 39

500 - 2800 mm / 19.69 - 110.24 in (res. 1.4 mm / 55 mil),

450 - 2400 mm / 17.72 - 94.49 in (res. 1.0 mm / 39 mil),

420 - 1500 mm / 16.54 - 59.06 in (res. 0.5 mm / 20 mil),

600 - 980 mm / 23.62 - 38.58 in (res. 0.33 mm / 13 mil)

Communication specifications

Available interfaces: Keyboard Wedge, RS232C, USB(HID)

Identification

Supported barcode symbologies (1D): JAN/UPC/EAN incl. add on, Chinese post, Codabar/NW-7, Code 11, Code 39, Code 93, Code 128, IATA, ISBN, Industrial 2of5, Interleaved 2of5, Korean Postal Authority code, Matrix 2of5, MSI/Plessey, RSS, Telepen, UCC/EAN-128

Supported 2D code symbologies: MicroPDF417, PDF417

Functionality

Trigger mode: manual, auto-trigger

Environmental specifications

Temperature in operation: -10 to 60 °C / 14 to 140 °F

Temperature in storage: -30 to 70 °C / -22 to 158 °F

Humidity in operation: 5 - 95 % (non-condensing)

Humidity in storage: 5 - 95 % (non-condensing)

Ambient fluorescent light rejection: 4,000 lx max.

Ambient direct sun light rejection: 80,000 lx max.

Ambient incandescent light rejection: 4,000 lx max.

Shock drop test: 2 m / 6.5 ft drop onto concrete surface

Shock vibration test: 10 - 100 Hz with 2G for 30 min

Protection (dust and moisture, IEC529): IP 54

Physical specifications

Dimensions: 68 x 50 x 155 mm / 2.68 x 5.91 x 6.10 in

Case material: ABS

Weight body: Ca. 210 g / 7.4 oz

Connector Keyboard Wedge: MiniDIN6 F/M

Connector RS232: DB9 with external power

Connector USB: USB-A

Regulatory

Laser safety class: JIS-C-6802 Class 1, IEC 60825-1 Class 1, FDA CDRH Class I


EMC / Product compliance: CE, FCC, VCCI, RoHS

Enclosed items

Power supply: 6V (External power for RS232)


Depth of field

Unit: mm (in)

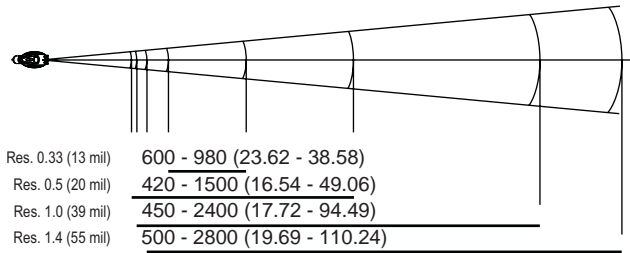

Dimensions

Unit: mm (in)

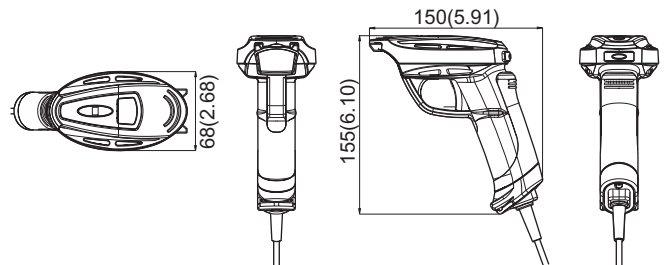

Conditions

To be determined: Availability & Ordering quantity