

KEY FEATURES

- Intel® Atom™ D525 1.8GHz Dual Core w/ 1MB L2 Cache
- Maximum 4GB DDR3 RAM
- 4 USB Ports, 1 PS/2 Port, 3 Serial Ports, Dual VGA Port, Audio Port
- SSD compatible
- Easily wall or surface mountable
- Die-cast aluminum chassis for heat diffusion
- Liquid and Splash Resistant
- Fan Free



TX3100 Series

About Posiflex

Designer and manufacturer of Point-of-Service and industrial touch terminals

Revolutionary technology, reliable quality, reasonable pricing and recognized service

Delivers reliable terminals for maximum uptime and lower total cost of ownership

Comprehensive suite of peripherals and services

Over 25 years of innovative excellence with more than 30 patents for innovation

Global presence

Two ISO 9001/9002/14001 Certified Facilities

Industrial Compact POS Box

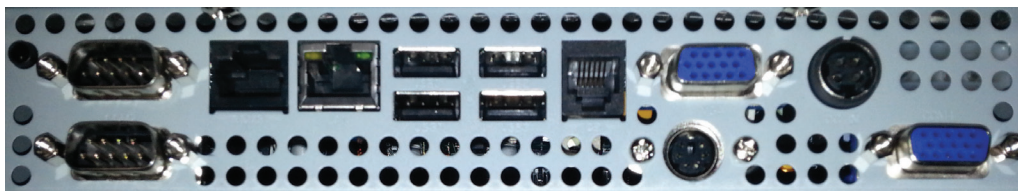
The TX3100 presents power and performance in a small PC footprint. Use the TX3100 with an optional Posiflex touch screen monitor or any LCD monitor of choice.





The TX3100 can be easily mounted under the counter or on the wall to maximize working space. With its patented fast cooling, aluminum alloy chasis design, your business can enjoy maximum uptime and energy savings. The TX3100 is equipped with an Intel® Atom™ D525 1.8GHz, DDR3 memory and supports POSReady, POSReady 7, Windows XP Pro, and Windows 7 Pro operating systems.

The TX3100 empowers your business with scalability and flexibility, as it can easily be used on several form factors, offering you diversity with 100% interoperability.

For more information call 888.968.1668 today!

Specifications

SPECIFICATIONS		TX3100S	AVAILABLE SERVICES
Processor	Intel® Atom™ D525 Dual Core 1.8GHz, 1MB L2 Cache		<ul style="list-style-type: none">• Standard and Extended Warranty Extend your depot warranty up to 5 years.• Advance Exchange We ship overnight replacement equipment directly to your business. You return the faulty unit to Posiflex.• OnSite Service Expert technicians will efficiently handle the complete equipment swap and return process.• Regional Repair Depots Three regional depots assure fast turn-around time on repairs.• Post Warranty Support Spare parts, in addition to a flat rate repair program, for post warranty needs.• Installation Services Let our nationwide network of experts stage and install your equipment.• OEM Design and Integration Our Product Development Team helps design equipment, for custom hardware applications.
System Memory	DDR3 800 MHz, SO-DIMM socket x 1 (2GB default)		
Maximum Memory	4GB		
Power Supply	12V DC Power adaptor, 60W		
Storage Device	2.5" SATA 160GB HDD or SSD Kit (optional)		
Supported OS	POSReady / POSReady 7 / WinXP Pro / Win7 Pro / Linux ¹		
PHYSICAL DIMENSIONS			
Dimensions (WxDxH)	10.6" x 7.87" x 3.38"		
Weight (Pounds)	5 lbs		
CONNECTIVITY			
LAN Port	1 x RJ-45 10/100/1000 Base-T Ethernet		
Serial Port	2x 9-pin male d-sub, 1x RJ-50 (5V/12V support on COM1/COM2/COM3)		
PS/2 Port	Yes		
VGA Port	2 x 15-pin female d-sub RGB analog (12V support for Posiflex LCD Monitors)		
CR Port	1 x RJ-11 port controls 2 cash drawers		
Standard USB Port(s)	4 x USB 2.0 Type A port		
Audio Port	Yes		
			

PERIPHERALS			
Touch Monitor - TM8115 5-Wire USB Resistive Touch Screen 	Magnetic Stripe Reader - SD404 Biometric or Encrypted options 	Thermal Printer - PP8000 80mm Wide, Printing Speed: 220mm/second 	Cash drawer - CR6300 Printer driven and USB options available 

¹Driver Support Only

See www.posiflexusa.com for a complete line of peripherals

POSIFLEX™
 Be the Pioneer, Be the Leader
 30689 Huntwood Avenue
 Hayward, CA 94544
 Toll-free: 888.968.1668
 Phone: 510.429.7097
 Fax: 510.475.0982
 E-mail: sales@posiflexusa.com
www.posiflexusa.com

