

# NSR-500

Network Surveillance Recording Server

**SONY**  
make.believe

The NSR-500 is Sony's 16-channel full-HD network surveillance recording server delivering an excellent cost-performance ratio.

Six models with different storage capacities are available, so you can select according to your precise requirements.



## FEATURES

### ■ Long-duration Recording

With a 12 TB HDD (2 TB x 6), you can record more than 300 hours of high-quality full-HD images compressed at 4 Mbps with a frame rate of 30 fps.

### ■ RAID Technology to Prevent Disk-failure Data Loss

The hard disk storage units of the NSR-500 are configured with high redundancy. They feature RAID implementations and hotswappable capabilities to protect important data against hard disk failure, 24 hours a day. You can choose from RAID 1 (1+0), RAID 5 or RAID 5 + Hot Spare, depending on your system requirements.

### ■ Optional Licenses for Future System Expansion

The optional NSBK-CL05 allows you to add extra licenses, and you can connect up to 24 network cameras to a single NSR-500 (including the original 16 cameras).

### ■ Easy Setup and Easy Operation


The NSR-500 detects Sony's network cameras in a network and sets up all the parameters of each camera in a step-by-step manner with a dedicated setup wizard. This drastically reduces the time required for system installation. Images from cameras are assigned automatically to a monitor layout menu, so that you can start monitoring instantly.

### ■ Backward System Compatibility


The NSR-500 can be used with Sony's existing recording systems such as the NSR-1000 Series, and RealShot™ Manager Advanced, through the RealShot Manager Advanced client, whose software can be downloaded from the NSR-500.

## CONNECTORS

### Front Panel (Cover Open) NSR-500

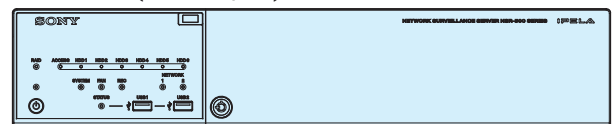

### Rear Panel NSR-500

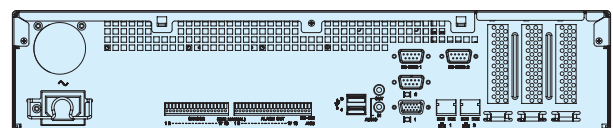

**IPELA**™

## SPECIFICATIONS

NSR-500	
<b>Video/Recording</b>	
Number of cameras supported	16 (max. 24ch with NSBK-CL05)
Video compression (IP camera)	H.264, MPEG-4, JPEG
Total recording frame rate (at H.264, full-HD, 4 Mbps)	480 fps
Recording frame rate / camera	Max. 30 fps / camera
Hard disk drives (physical capacity)	Up to 12 TB (2 TB x 6)
Hard disk drives (interface)	Serial ATA
Hard disk drives (RAID level) *RAID level to be selected depends on the number of HDDs	RAID 0, 1 (1+0), 5, 5+hot spare
Hard disk drives (recording capacity)	NSR-500:01 (RAID no) : Approx. 880 GB <sup>*2</sup> NSR-500:02 (RAID 0) : Approx. 1.7 TB NSR-500:04 (RAID 5) : Approx. 2.6 TB NSR-500:08 (RAID 5) : Approx. 5.4 TB NSR-500:12 (RAID 5) : Approx. 9.0 TB
Expansion storage	iSCSI storage (max. 16 TB)
<b>Video Output</b>	
Monitor OUT *1	Analog RGB (D-sub 15-pin) x 1
Monitor OUT display resolution	1,920 x 1,200 / 1,920 x 1,080 / 1,360 x 768 / 1,600 x 1,200 / 1,280 x 1,024 / 1,024 x 768
<b>Audio Output</b>	
Audio OUT	Stereo mini jack x 1
<b>Sensor Input/Alarm Output</b>	
Sensor IN	Compatible with DC3.3V to 24V, photo coupler input x 8 (insulated from main unit)
Alarm OUT	Max. DC 24V/1A, mechanical relay output x 8 (insulated from main unit)
<b>Other Interfaces</b>	
Ethernet	1000BASE-T/100BASE-TX/10BASE-T x 2
USB	USB2.0 x 2 (Front), USB2.0 x 2 (Rear)
Serial interface (for UPS)	RS-232C : D-sub 9-pin x 1
<b>General</b>	
Dimensions (W x H x D)	17 3/8 x 3 1/2 x 15 1/2 inch (440 x 89 x 392 mm) (2U), excluding protrusions
Weight	Approx. 20 lb 12 oz (9.4 kg)
Power requirements	100 V to 127 V AC / 200 V to 240 V (50/60 Hz)
Power consumption	Max. 250 W (100-240 V 3.5-1.5 A)
Operating temperature	41 to 104 degrees F (5 to 40 degrees C)
Operating humidity	20 to 80% (no condensing)
Supplied accessories	Installation manual x 1, CD-ROM x 1, Flyer (WEEE) x 1, Flyer (EU battery) x 1, Warranty booklet x 1, Front panel key x 2, Rubber PAD x 4, HDD screw x 24 (*w/o HDD model only), Setup Disc x 1 (*w/o HDD model only)

\*1: Monitoring performance depends on the number of cameras registered and recorded, so Display Out is used for making settings.

\*2: 1 GB = 1 billion bytes, a portion of which is used for data management functions.



## LINE UP

	NSR-500					
	NSR-500:00	NSR-500:01	NSR-500:02	NSR-500:04	NSR-500:08	NSR-500:12
HDD	-	1 TB x1	1 TB x2	1 TB x4	2 TB x4	2 TB x6
Physical capacity	-	1 TB	2 TB	4 TB	8 TB	12 TB
Default RAID level	-	-	RAID 0	RAID 5		

## OPTIONAL ACCESSORIES

- Additional Camera License NSBK-CL05
- Hard Disk Drive (1 TB) NSBK-HS05:01
- Hard Disk Drive (2 TB) NSBK-HS05:02

## SYSTEM EXAMPLES

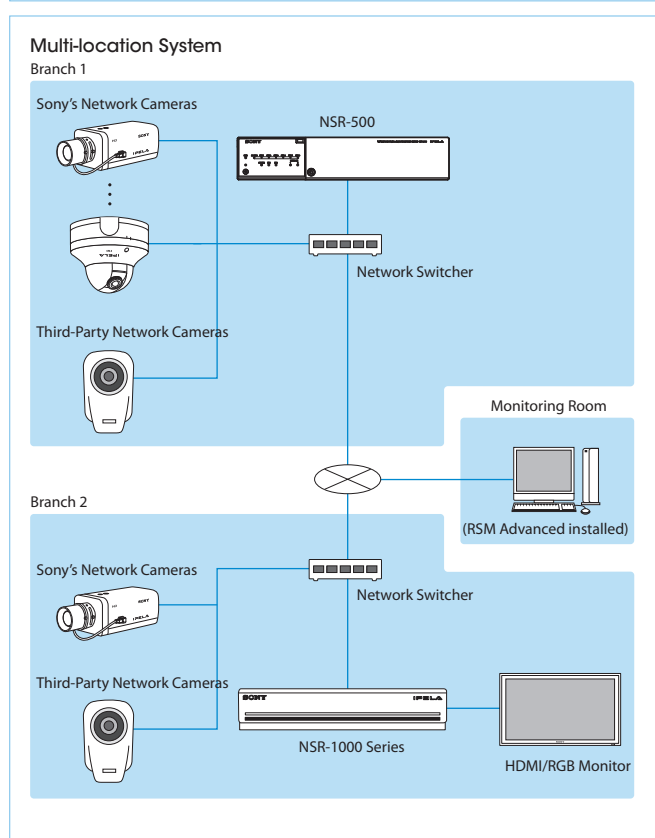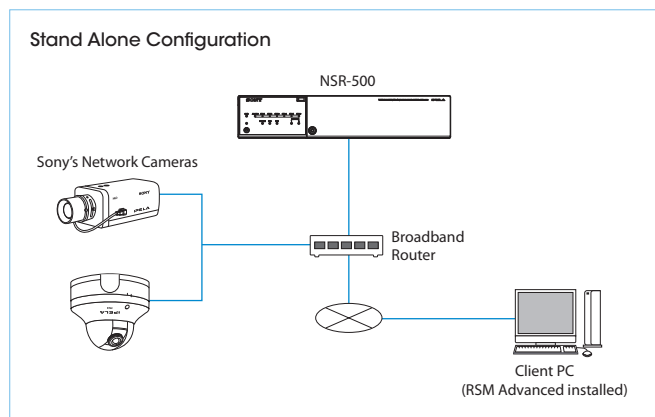

©2011 Sony Electronics Inc. All rights reserved.  
 Reproduction in whole or in part without written permission is prohibited.  
 Features and specifications are as of software version 1.1,  
 and subject to change without notice.  
 Sony, the Sony logo, the Sony make.believe logo,  
 IPELA and RealShot are trademarks of Sony.  
 All other trademarks are the properties of their respective owners.