

Uniquely creative, uniquely responsive to your needs.

KIOSK PRINTER


SK4-21/31

ENTRY CLASS KIOSK PRINTER

* SK4-21 (2 inch model) will be available soon.


Features

- Small and compact design
- Three ways of paper position support
- 150mm/sec speed printing
- A good balance of performance and cost
- LED Bezel option and Anti-Paper Jam Bezel option available
- Windows® Utility driver with Remote Status monitor function available

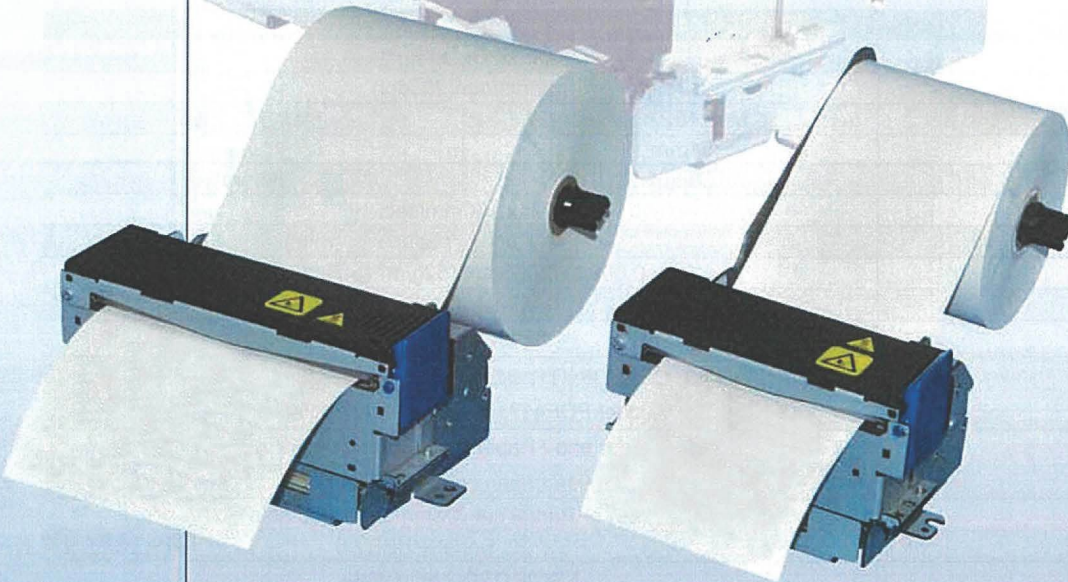

Head open design


[3 paper roll positions support]

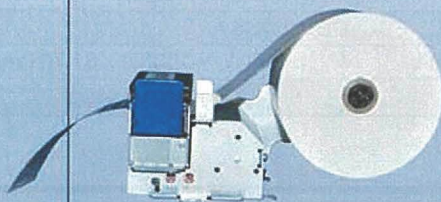

Rear position



Top position
(Paper dumper is required)

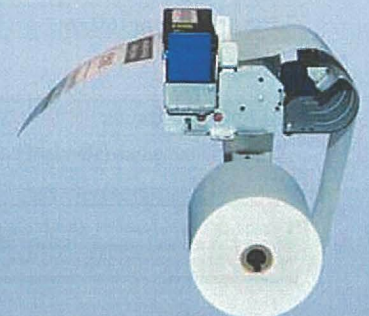

Bottom position
(Paper guide is required)



Scan Here !!
to Download SDK

SK4-21/31


Features

- Small and compact design
- Three ways of paper position support
- 150mm/sec speed printing
- A good balance of performance and cost
- LED Bezel option and Anti-Paper Jam Bezel option available
- Windows® Utility driver with Remote Status monitor function available

Applications

- Self order Kiosk terminal
- Self check out Kiosk terminal
- Queue systems
- Vending machine

Options

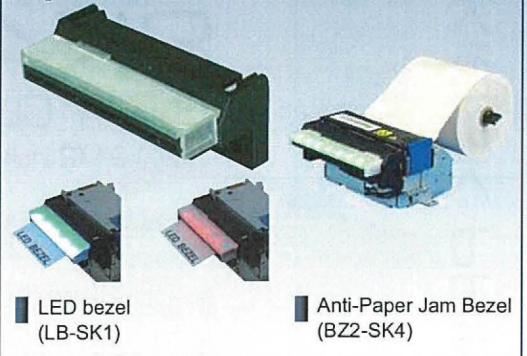

Specifications	SK4-21	SK4-31
Printing method	Direct line thermal	
Resolution	8dots/mm(203dpi)	
Number of dots	Max 432 dots	Max 576 dots
Printing width	54mm	72mm
Paper width	58mm	80mm
Printing speed	Max.150mm/sec.	
Paper style	Receipt paper	
Paper thickness	0.059 to 0.085mm (52g/m ² to 72g/m ²)	
Paper roll diameter	Max. φ 83mm	
Character font	8x16, 12x24 dots	
Barcodes	JAN8/13, CODE39, ITF, CODABAR, CODE128, UPC-A/E, QR Maxicode, PDF417, Micro PDF147, DataMatrix	
Paper sensor	Near end / Paper empty / Black mark	
Paper loading	Head open or Auto loading	
Auto cutter	Full cut or Partial cut (Command selectable)	
Interface	RS232C Serial + USB2.0	
Emulations	ESC/POST™ compatible	
Power supply	DC 24V±5% / TYP 2.7A	
Operating temperature	-5 to 50°C, 20%RH to 80%RH (No condensation)	
Storage temperature	-20 to +70°C, 10%RH to 90%RH (No condensation)	
Reliability	Print head : 100km, 100million pulses Auto cutter : 1,000,000 cuts (Specified paper)	
Safety standards	VCCI, FCC, CE CLASS A	
Overall dimensions (standard paper roll position)	86(W) x 150(D) x 81.7(H)mm	106(W) x 150(D) x 81.7(H)mm
Weight	Approx. 356g	Approx. 410g

*ESC/POS is a registered trademark of Seiko Epson Corporation.

*Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.

*All specifications are subject to change without notice.