


VERSO COMPACT COMPACT MODEL



VERSO COMPACT + WBJ




VERSO COMPACT + WBOV

- Indoor/outdoor
- Entirely made of technopolymer (polycarbonate)
- Side opening, easy camera servicing
- Weatherproof standard IP66 (with cable glands)
- Good resistance to impacts
- Different mounting options: standard bracket or cable management bracket or P&T

Innovative and stylish housing, designed to simplify installation and servicing, VERSO COMPACT ensures total protection against all environmental conditions for standard cameras and small compact zoom lenses. Due to its side opening, accessibility to the camera, lens, and all its connections is made far easier. Entirely made with the newest, most resistant, techopolymer, VERSO COMPACT guarantees high impact resistance, high weather protection to external agents and UV rays.

Its weatherproof features are ensured by EPDM-rubber gaskets and 2 cable glands with their specific gaskets. VERSO COMPACT offers the possibility of various mountings, either wall or top mount, standard or cable management bracket, and on a Pan & Tilt head. A wide range of accessories is available, including: sunshield, heater kit, camera power supply and heater-fan assistant. These accessories are supplied as a simple plug-in kit for easy installation.

MODELS				
	Sunshield	Heater 115/230VAC	Heater 12VDC/24VAC	Heater fan-assisted 24VAC
HPV36D0A000B				
HPV36K0A000B	•			
HPV36K1A000B	•	•		
HPV36K2A000B	•		•	
HPV36K2A015B	•			•

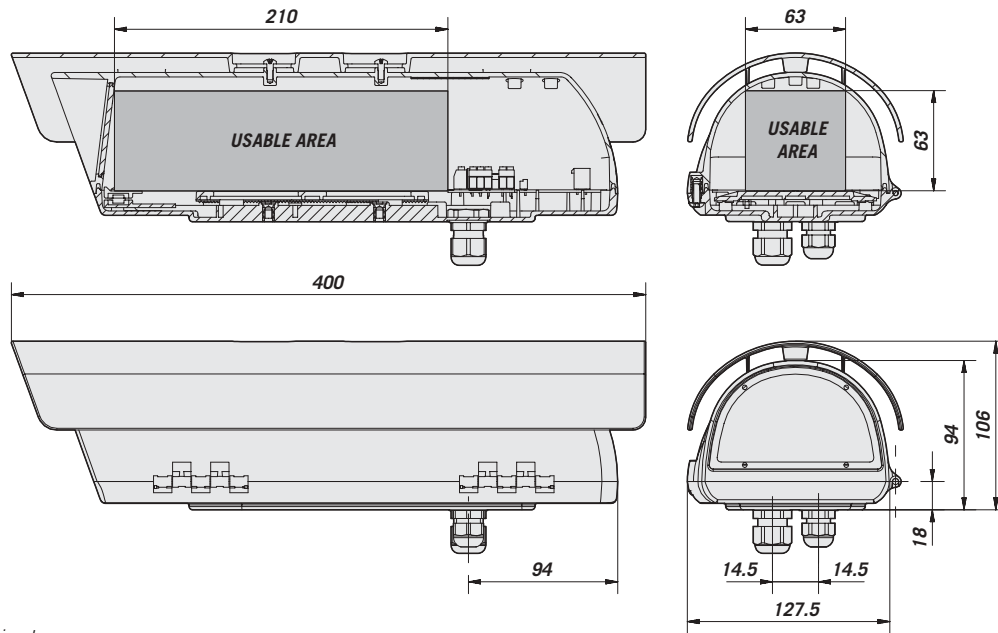

The values are in millimeters.

TECHNICAL DATA

GENERAL

- Entirely made of technopolymer (polycarbonate)
- RAL9002 Colour
- Supplied with: instruction manual, accessories for camera/lens installation

MECHANICAL

- 2 removable cable glands: 1xPG9 and 1xPG11
- Internal usable dimensions (WxH): 63x63 mm (2.5x2.5 in)
- Polycarbonate window (WxH): 98x55 mm (3.9x2.2 in)
- Usable length with accessories: 210 mm (8.3 in)

ELECTRICAL

Heater, Ton 15°C+/-3°C (59°F) Toff 22°C +/-3°C (71°F):

OHPVH2 IN 12VDC/24VAC, consumption 20W

OHPVH1 IN 115/230VAC, consumption 40W

Camera power supply:

OHEPS19B Power supply wide range IN 100-240VAC, 50/60Hz - OUT 12VDC, 1A max

OHEPS20 Power supply IN 230VAC, 50Hz - OUT 24VAC, 400mA max

ACCESSORIES

OHPVS36 Sunshield

OHPVH1 Heater IN 115/230VAC

OHPVH2 Heater IN 12VDC/24VAC

OHEPS19B Power supply wide range IN 100-240VAC, 50/60Hz - OUT 12VDC, 1A max

OHEPS20 Power supply IN 230VAC, 50Hz - OUT 24VAC, 400mA max

OHPVV1 Heater fan assistant, continuous duty, IN 12VDC

OHPVV2 Heater fan assistant, continuous duty, IN 24VAC

OHPVV3 Heater fan assistant, continuous duty, IN 230VAC, with wide range power supply IN 100-240VAC, 50/60Hz - OUT 12VDC, 1A

RELATED PRODUCTS

Brackets:

- WBJ** Wall mount with joint for VERSO COMPACT with cable glands
- WBM** Wall mount with joint for VERSO COMPACT with cable glands
- WFWC** Column mount with joint for VERSO COMPACT with cable glands
- WCM3** Ceiling mount with joint for VERSO COMPACT with cable glands
- WCM5** Ceiling mount with joint for VERSO COMPACT with cable glands (J shape)
- WBOV** Wall feed-through bracket
- WBOV3** WBOV mount, counterplate and junction-box with cable management
- WCM4** Ceiling feed-through bracket (J shape)

P&T:

- PTH300 series** P&T, 50/60Hz for VERSO COMPACT with cable glands

ENVIRONMENT

- Indoor-Outdoor
- Operating temperature:
VERSO COMPACT with heater: -20°C up to + 50°C (-4°+122°F)
- Very good resistance to the following chemical agents: basics, alcohols, gasses, hydrocarbons
- Good resistance: organic and inorganic acids, oils
- Low resistance: solvents

COMPLIANCE TO

- CE according to EN 61000-6-3, EN 60065, EN 50130-4
- IP66 (with cable glands)
- V1 fire-self extinguish according to UL94
- Impact resistance IK10 according to EN 50102 standard



Unit Weight (kg / lb):
HPV36K1: 0,7 / 1,5

Package Weight (kg / lb):
HPV36K1 : 1,4 / 3

Package Dimensions (cm / in):
HPV36K1 : 16x15x43 / 6.2x5.9x17

Master Carton (units):
HPV36K1 : 10