


32" Full HD LED Professional Display

Convenience and Control for Hospitality Environments

CDE3200-L

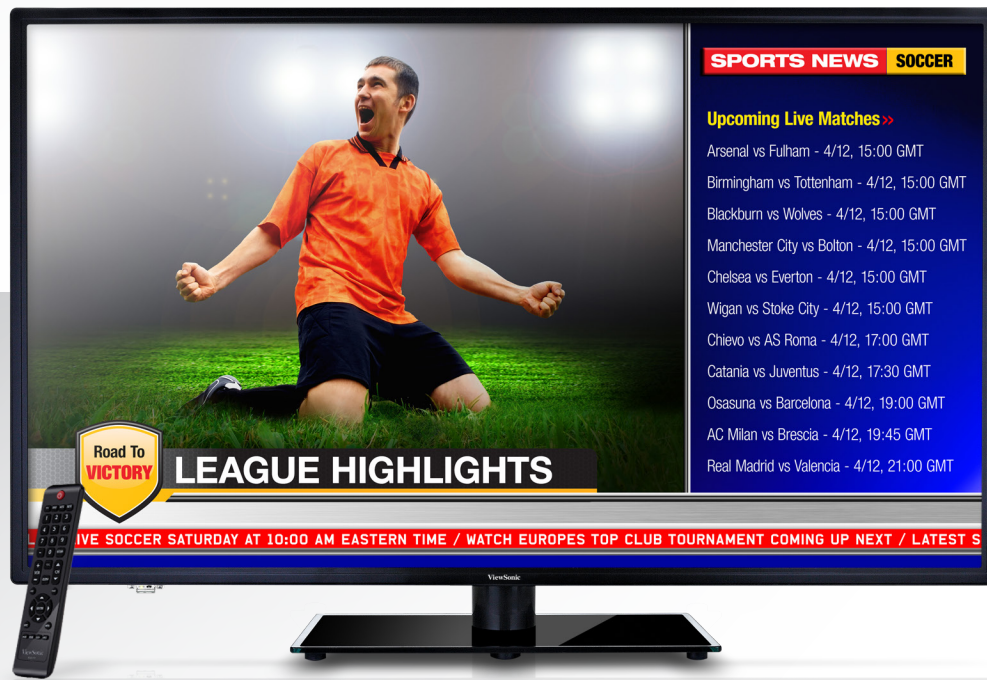

The ViewSonic® CDE3200-L 32" commercial LED display is an ideal choice for hotels, restaurants, and other hospitality environments. This Full HD display has a glossy-finish, slim-bezel design with a glass stand, and comes with versatile HDMI (x3), VGA, Composite, YPbPr and RS-232 connectivity. With optimal brightness, a high contrast ratio, and fast 6.5ms response time, it delivers crisp images and superior color performance. Dual integrated 10W stereo speakers and SPDIF interface deliver quality sound – making this display a complete multimedia entertainment solution. An RS-232 control port with IR pass-through provides automated control for hospitality and commercial installations. HDMI® CEC pass-through support provides one-touch-play and other control features for multiple connected devices such as HD set-top-boxes, media players, and Blu-ray™ players. Also, a programmable hospitality menu allows for custom calibration of features such as channel defaults, audio levels, and power up—making the CDE3200-L ideal for use as in-room hotel televisions.

32" Full HD 1920x1080 Display Resolution

The CDE3200-L features Full HD 1920x1080 resolution to deliver superior pixel-by-pixel performance for a more realistic viewing experience. With Full HD resolution, experience greater image clarity and detail that bring high-definition TV programs, HD movies, and other multimedia content to life.

Hospitality Mode for Automated Multi-screen Control

The CDE3200-L is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a programmable hospitality setting, each television can have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.

USB Multimedia Playback & Cloning

With the handy PC-less USB playback feature, photos and music can be immediately played and shared by plugging a USB drive into the display. In addition, the CDE3200-L includes USB cloning for easy duplication in multi-screen environments.

IR Pass-through for Multi-device Control

The CDE3200-L features a RS-232 control port with IR pass-through to provide automated control for hospitality and commercial display installations. IR pass-through offers local control for set-top boxes or other connected devices, directly from the display's remote controller.

HDMI CEC Delivers More Viewing Possibilities

With HDMI CEC functionality, remote controller signals can be transmitted via HDMI cable to connected HDMI devices. This enables out-of-sight DVD players, sound systems, and other devices to be directly controlled with the display's remote controller for a wider range of viewing possibilities.

32" Full HD LED Professional Display

CDE3200-L




Versatile Input Connectivity

VGA, YPbPr, and USB inputs provide extreme flexibility, while 3 HDMI ports allow connection to HD set-top-boxes, media players, and Blu-ray players.

Applications

- Hospitality / Entertainment display
- Business / Educational display – boardroom and classroom
- Digital signage – small to mid-size business
- Medical office and waiting room entertainment displays
- Hotel guest room entertainment
- Sports bar and restaurant entertainment displays

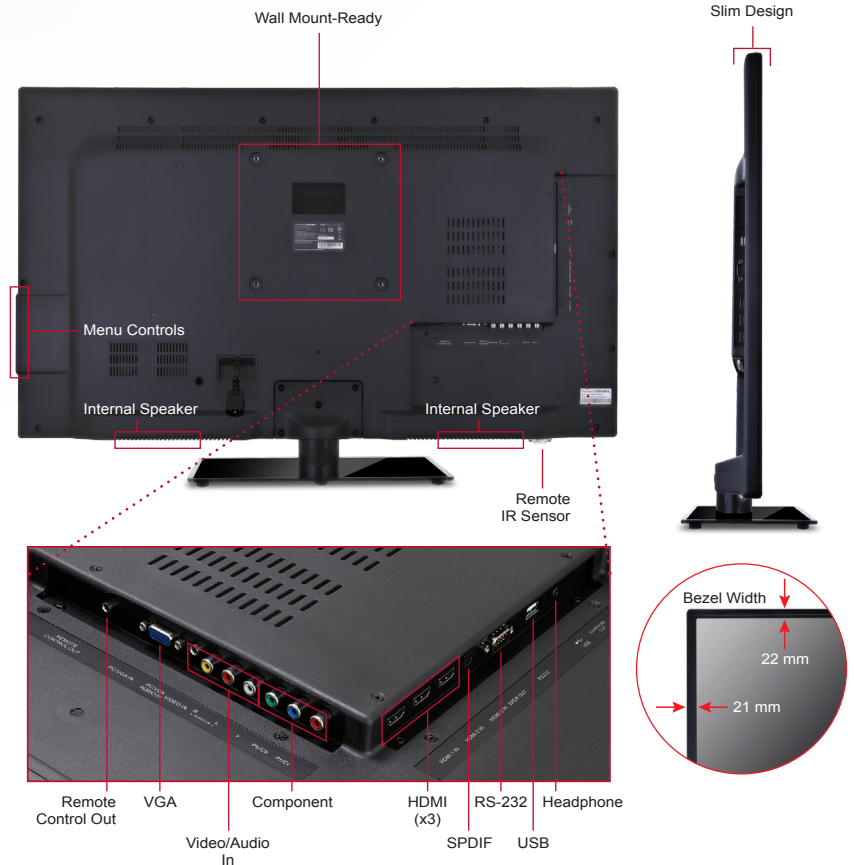

Specifications

PANEL	Type	32" color TFT active matrix, wide LCD with WLED Backlight
	Display Area	27.5" horizontal x 15.5" vertical; 32" diagonal
	Optimum Resolution	1920x1080, 600mm dot pitch
	Contrast Ratio	3000:1 (typ)
	Viewing Angles	170° horizontal, 170° vertical
	Response Time	6.5ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	350 cd/m² (typ)
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating (3H)
INPUT	Video Input	HDMI, component, VGA, CVBS
	Control Input/Output	RS-232, USB 2.0
AUDIO OUTPUT		
Internal 10-watt speakers (x2), SPDIF optical		
INPUT SIGNAL	TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p
	Connector	15-pin mini D-sub (VGA), RCA Audio In, headphone out
CONNECTOR	Analog	HDMI (x3), YPbPr, CVBS, SPDIF, USB
	Digital	3-pin plug
CONTROLS	Panel	Menu, VOL +/-, Down/Up, Input, Power
	Picture	Picture Mode, Brightness, Contrast, Color, Tint, Sharpness, Backlight, Screen Size, Auto Adjust, H. Position, V. Position, Clock, Phase, Color Temperature, Dynamic Contrast, Film Mode, Noise Reduction, MPEG Noise Reduction
	Sound	Sound Setting, Digital Audio Output, Equalizer Setting, SRS Setting
	Parental	Lock Parent Control, V-Chip, Movie Rating, English Rating, French Rating, Block UnRated Show, Change Password, Keypad Lock, Source Lock, System Lock
	Setup	Closed Caption, Menu Language, Clock, OSD Transparency, Time Zone, Auto Clock, Setup Time, Day of Week, Daylight Saving Time, Time Format, OSD Timer
	Others	Blue Back, No Signal Power Off, No Operation Power Off, All Reset, Audio Only, Display ID, Usage Monitor

POWER	Voltage	AC 100–240V (universal), 50–60Hz
	Consumption	38W (typ)
OPERATING CONDITIONS	Temperature	32–104°F (0–40°C)
	Humidity	20–80% (non-condensing)
DIMENSIONS (W x H x D)	Physical With Stand	29.5 x 19.2 x 7.1 in. / 747.8 x 488.1 x 180 mm
	Physical Without Stand	29.5 x 17.4 x 3.1 in. / 474.8 x 442 x 77.4 mm
BEZEL DIMENSIONS	Left/Right	21mm / 21mm
	Top/Bottom	22mm / 21mm
WEIGHT	Net With Stand	16.1 lb. / 7.3 kg
	Net Without Stand	14.3 lb. / 6.5 kg
WALL MOUNT	Gross	19.8 lb. / 9.0 kg
	VESA®	200mm x 100mm
REGULATIONS		
FCC, CE, UL, RoHS		
RECYCLE/DISPOSAL		
Please dispose of in accordance with local, state or federal laws.		
WARRANTY		
Three-year limited warranty on parts, labor and backlight		

What's in the box?

CDE3200-L display, power cord, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. TruSurround HD and the SRS Logo are trademarks or registered trademarks of SRS Labs. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2014 ViewSonic Corporation. All rights reserved. [17317-008-07/14]

Sales: (888) 881-8781 or SalesInfo@ViewSonic.com • More product information: www.ViewSonic.com