

55" Narrow Bezel Commercial-Grade HD Display

Durable and Reliable Design for 24/7 Use

CDP5562-L



Shine bright and captivate your audience even in high ambient light with the commercial-grade quality of the ViewSonic® CDP5562-L 55" high-performance HD LED display. Vibrant Full HD images and powerful stereo sound combine to give your messages maximum impact while your video walls grab greater attention, thanks to the narrow bezel design. Not only does the CDP5562-L deliver the durability you need for reliable 24/7 operation, it makes it all easy to manage with a user-friendly scheduling interface, integrated DVI port and RS232 output with IR pass-through enabling up to 5x5 daisy-chained displays.

Key Features:

SuperClear® wide viewing angle technology delivers vivid, accurate colors from nearly any angle

Versatile connectivity including HDMI, DisplayPort, DVI, D-Sub, YPbPr, and CVBS, for convenient, one-time installation of a variety of high-definition devices

RS232 with IR pass-through enables easy management via a single notebook or PC

Sleek, narrow bezel optimizes high-impact video wall installation

Mercury-free LED backlight reduces power consumption

Designed for 24/7 continuous operation with 50,000-hour lifespan*

Designed for:

Retail


Hospitality

Public spaces

Transportation

55" Narrow Bezel Commercial-Grade HD Display

CDP5562-L

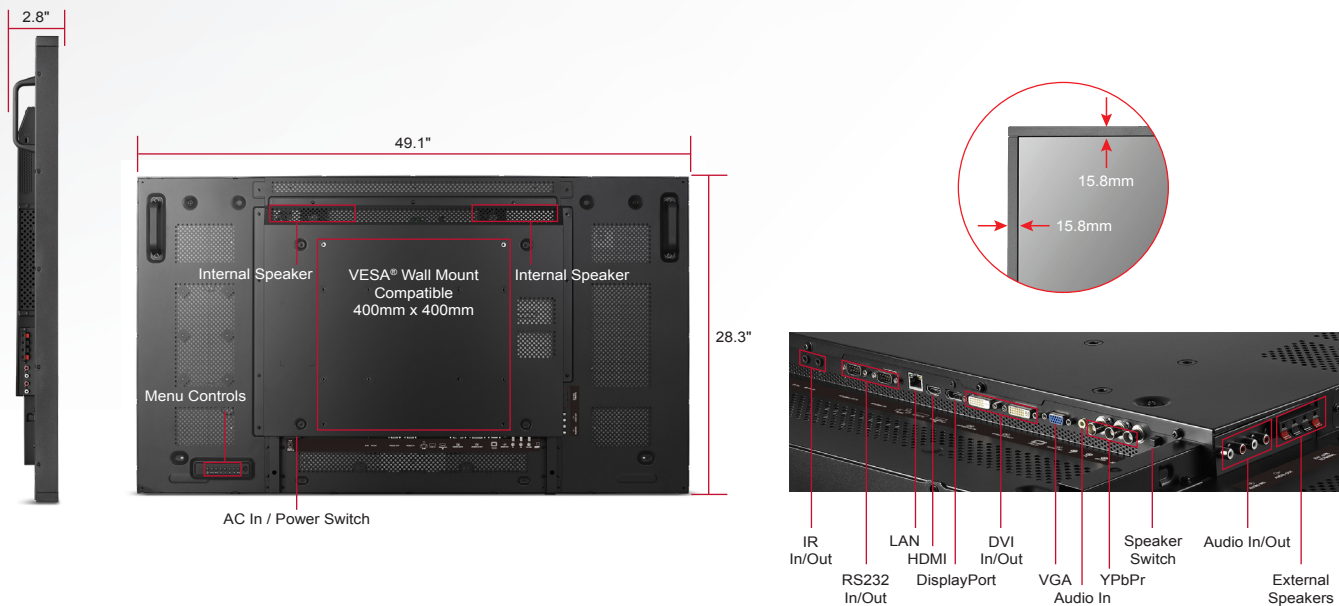

Specifications

PANEL	Type	55" color TFT LCD Module with LED Backlight
	Display Area	47.6" horizontal x 26.8" vertical; 55" diagonal
	Optimum Resolution	1920 x 1080 HD
	Contrast Ratio	1300:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	12ms
	Light Source	Long life, 50,000* hrs. (typ)
	Brightness	700 cd/m2 (typ)
	Aspect Ratio	16:9
	Panel Surface	Hard coating (3H)
INPUT	Video Input	HDMI, DVI, DP, component (BNC), VGA
	Video Output	VGA, DVI-D
	Control Input/Output	RS232, RJ45
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
INPUT SIGNAL	TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog	15-pin mini D-sub (VGA), RCA Audio In
	Digital	HDMI, DVI-D, DisplayPort, YPbPr (BNC)
	Power	3-pin plug
CONTROLS	Panel	POWER, MUTE, INPUT, VOL +/-, UP, DOWN, MENU
	Picture	Brightness, Contrast, Sharpness, Black Level, Tint, Color, Color Temperature, Gamma Selection, Noise Reduction, Film Mode, Picture Reset
	Screen	Auto Setup, Auto Adjust, H Position, V Position, Clock, Clock Phase, Zoom Mode, Custom Zoom, Input Resolution, Screen Reset
	Sound	Balance, Treble, Bass, Audio Reset
	PIP	PIP Mode, PIP Size, PIP Audio, PIP H Position, PIP V Position, SUB input, PIP Reset

CONTROLS (cont)	Configuration 1	Off Timer, Schedule, Data and Time, Configuration 1 Reset
	Configuration 2	Language, OSD Turn Off, OSD H Position, OSD V Position, Information OSD, Monitor Information, Monitor ID, IR Control, Tiling, Power on Delay, Closed Caption, Configuration 2 Reset
	Configuration 3	Power Save, Heat Status, Screen Saver, Side Border Color, Configuration 3 Reset
	Advanced Option	Input Change, Terminal Setting, Scan Conversion, Color System, Scan Mode, Serial Control, LAN Setting, APM, Advanced Option Reset, Factory Reset
POWER	Voltage	AC 100–240V (universal), 50–60Hz
	Consumption	245W (typ)
OPERATING CONDITIONS	Temperature	32–104°F (0–40°C)
	Humidity	20–80% (non-condensing)
DIMENSIONS (W x H x D)	Physical	49.1 x 28.3 x 2.8 in. / 1247 x 717.8 x 70 mm
	Packaging	58.2 x 38.5 x 15.8 in. / 1476 x 978 x 400 mm
BEZEL DIMENSIONS	Left/Right	15.8 mm / 15.8mm
	Top/Bottom	15.8 mm / 15.8mm
WEIGHT	Net	67.4 lb. / 30.6 kg
	Gross	79.5 lb. / 36.1 kg
WALL MOUNT	VESA®	400 x 400 mm
REGULATIONS		CE, CB, WEEE, C-tick, FCC, ICES003, UL/cUL, CE, CB, CU, ENERGY STAR 6.0
RECYCLE / DISPOSAL		Please dispose of in accordance with local, state or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

Stand	STND-021
Wall Mount Kit	WMK-014



What's in the box?

CDP5562-L display, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.