

10.1" Multi-Touch All-in-One Electronic Mini Billboard

Touch Interactive Custom Messaging

EP1032r-T



The ViewSonic® EP1032r-T is a 10.1" multimedia all-in-one interactive electronic mini billboard. It delivers eye-catching touch-interactive commercial messaging at retail POS, hotel lobbies and front desks, conference and exhibition venues, and other high-visibility locations. The EP1032r-T features wireless b/g/n network and LAN connectivity for easy loading of content, and supports Power over Ethernet (PoE) for convenient one-wire installation. Multi-touch compatibility with HTML5 and SMIL formats delivers a 2-way interactive platform for dynamic, customized content. Its built-in media player, 4GB internal storage, and integrated speakers enable the playback of video clips, as well as photos and music, from a USB hard drive or SD/SDHC memory card. Bundled with Signage Manager Express software, the EP1032r-T effectively delivers customized messaging to target audiences. With VESA-mount compliance, the EP1032r-T is installation-ready for any high-visibility, high-traffic locations.

Perfect Size for Up-close, High-impact Messaging

The ViewSonic EP1032r-T all-in-one electronic mini billboard has a 10.1" LED display area with 1280 x 800 resolution. With its compact design, the EP1032r-T can be deployed anywhere, including retail shelf edges, hotel front desks, in meeting rooms, or on classroom doors. The EP1032r-T features 300-nit brightness and a 500:1 contrast ratio to deliver high-impact, quality messaging that will attract the attention of passersby.

Interactive On-demand Messaging

The EP1032r-T delivers on-demand advertising and messaging while increasing two-way communication with customers. With 2-point multi-touch capability, the EP1032r-T is the perfect interactive e-catalog display solution for shelf edges, retail counters, and information kiosks in high-traffic venues.

Convenient One-wire Installation via Power over Ethernet

The EP1032r-T utilizes state-of-the-art Power over Ethernet (PoE) technology for one-wire installation. This allows you to easily power and connect your displays with just a single cable. PoE also allows you to create multi-display digital signage installations, while reducing installation costs.

4GB of Internal Memory and SD/SDHC Card Slot

The EP1032r-T is capable of storing and playing hours and hours of high-definition multimedia content thanks to its 4GB of built-in, shock-resistant, solid-state memory. This reliable all-in-one electronic mini billboard will display dynamic content with no crashes, freezes, or lost content..

10.1" Multi-Touch All-in-One Electronic Mini Billboard

EP1032r-T



LAN


Easy Loading of Content through Wireless/ RJ45 Ethernet

The EP1032r-T integrates wireless 802.11 b/g/n network and RJ45 Ethernet connectivity, providing a convenient and efficient way to load content from a PC or laptop connection. Wireless/LAN connectivity can also be used to remotely load content to multiple displays.




Support for Dynamic W3C/SMIL-format Presentations

With the bundled Signage Manager Express software, the EP1032r-T can display W3C, HTML5, and SMIL content retrieved from the Internet. Display fresh and interesting content such as news, weather information, stock market trends, sports scores, social networking, or RSS feeds on multiple screens.

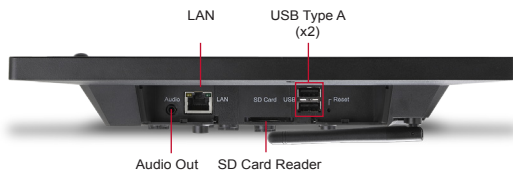

Audio Out SD Card Reader

VESA® Wall Mount
75mm x 75mm

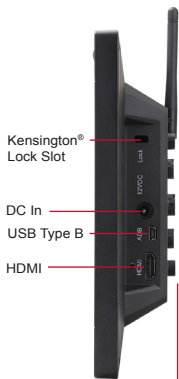


Kensington®
Lock Slot


DC In

USB Type B

HDMI

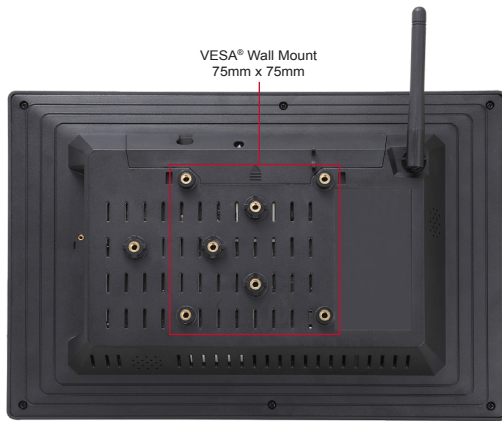

Wireless Antenna

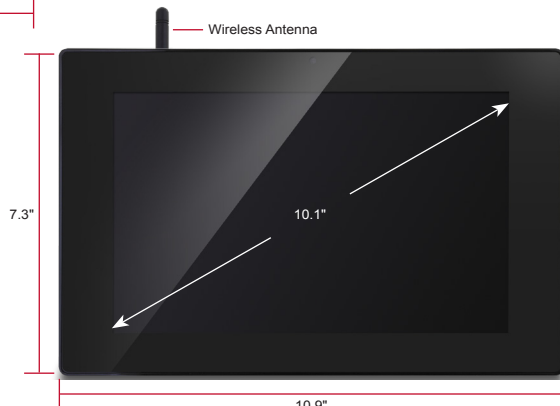

Specifications

PANEL	Type	10.1" TFT LCD Module with LED Backlight
	Display Area	8.6" horizontal x 5.2" vertical; 10.1" diagonal
	Optimum Resolution	1280 x 800
	Contrast Ratio	700:1 (typ)
	Viewing Angles	170° horizontal, 160° vertical
	Response Time	25ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	300 cd/m ² (typ)
	Panel Surface	Anti-glare
CONNECTIVITY	Digital	HDMI 1.3
	USB	Type A x2 (content loading, F/W upgrade, keyboard/mouse) Type B x1 (for F/W troubleshooting)
	LAN	RJ45
	Audio Output	3.5mm mini jack
FILE FORMATS	Card Reader	SD/SDHC
	Video	MPEG 1,2,4, WMV
	Audio	MPEG L2, MP3
	Photo	JPG, PNG
AUDIO	Dynamic	W3C HTML5, W3C SMIL 3.0
	Speakers	2W (x2)
WALL MOUNT	VESA	75 x 75mm
	Consumption	14.1W (typ)
POWER	Voltage	AC 100–240V (universal), 50–60Hz
	Temperature	32°F–104°F (0°C–40°C)
	Humidity	5%–85% (non-condensing)
OPERATING CONDITIONS	Altitude	0–6,561 ft (2,000m)
	Physical	10.9 x 7.3 x 1.6 in. / 278 x 186 x 40 mm
DIMENSIONS (W x H x D)	Packaging	12.6 x 10.0 x 3.5 in. / 320 x 255 x 89 mm
	Net	1.7 lbs. / 0.8 kg
WEIGHT	Gross	7.3 lbs. / 3.3 kg
REGULATIONS		FCC, CE
WARRANTY		1-year limited warranty on parts and labor

What's in the box?

EP1032r-T ePoster, AC adapter, ethernet cable, 3.5mm to RCAAC adapter, display stand and screws, Quick Start Guide, Software Setup Guide, ViewSonic Wizard CD (User Guide and Signage Manager Express software)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.