# 16" (15.6" viewable) Commercial-Grade TV

High-Definition Television for Hospitality Environments

### **Built-in HDTV Tuner**

The ViewSonic VT1602-L commercial TV has a built-in ATSC/NTSC/QAM HDTV tuner that receives both analog and high-definition TV signals.

# **USB Multimedia Playback & Cloning**

With the handy PC-less USB playback feature, photos and music can be immediately played and shared by plugging a USB drive into the display. In addition, the VT1602-L includes USB cloning for easy duplication in multi-screen environments.

# Hospitality Mode for Automated Multi-screen Control

The VT1602-L is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a programmable hospitality setting, each television can have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.

### Energy-saving LED Backlight with Long Lifespan

The VT1602-L utilizes an energy-saving LED backlight that consumes 35% less power than conventional CCFL backlight displays, and has an extended lifespan of up to 30,000 hours\*.

The ViewSonic<sup>®</sup> VT1602-L is a 16" (15.6" viewable) professional monitor with "edge white" LED technology, and a built-in ATSC/NTSC/QAM HDTV tuner ideal for hotel, retail, restaurant, and lounge TV systems. Featuring 1366 x 768 resolution, 650:1 contrast ratio, and 220-nit brightness, the VT1602-L delivers high-quality image performance. Integrated HDMI, D-Sub and YPbPr video inputs allow for versatile connectivity for high-definition devices. USB playback provides easy small-screen desktop signage by playing JPEG media files and MP3 audio. Users can also set up specific product calibration with internal programming features. Dual integrated 3W speakers and SPDIF functionality also make this LED TV a complete multimedia entertainment package.

# VT1602-L





# 16" (15.6" viewable) Commercial-Grade TV



# VT1602-L

# **3W Stereo Speakers with Digital Sound and External Speaker Out**

The VT1602-L display has integrated 3-watt stereo speakers with digital sound to enhance on-screen multimedia performance with crystal-clear sound effects. Users can also add external audio via the digital SPDIF audio-out port.

### Versatile Input Selection for Flexible Connectivity


With the VT1602-L's versatile selection of inputs, you can easily connect and use a variety of digital equipment for use in hotel rooms and public areas. This includes an HDMI port to connect to high-definition content sources, as well as D-sub ports and composite inputs.



- Small spaces requiring HD video and graphic content from multiple sources
- Hotels, restaurants, sport bars, and retail display shelves requiring versatile input functionality in a small screen
- · Small screen custom installations
- Security monitoring

#### **Optional Accessory**

Wall Mount.....WM-U1

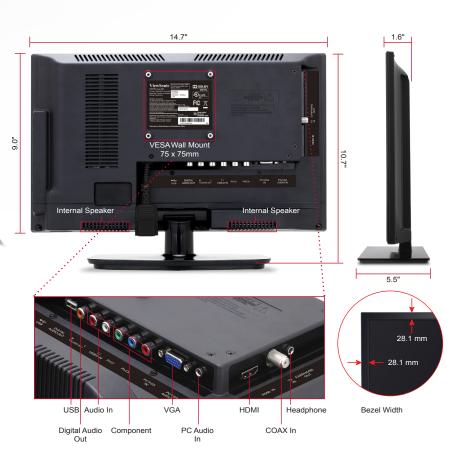

Specifications		
PANEL	Type Display Area Optimum Resolution Contrast Ratio Viewing Angles Response Time Light Source Brightness Aspect Ratio Panel Surface	Color TFT active matrix, wide LCD with WLED backlight 14.4" horizontal x 8.2" vertical; 15.6" diagonal 1366 x 768 650:1 (typ) 90° horizontal, 65° vertical 11ms Long life, 30,000 hrs. (typ) 220 cd/m² 16:9 Anti-glare, hard coating (3H)
INPUT	Video Input USB 2.0	HDMI, Component, VGA, RF (TV) / QAM JPEG, MP3
AUDIO OUTPUT	Speakers	Internal 3-watt (x2)
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog Digital Power	15-pin mini D-sub (VGA), RCA Audio In, PC Audio In, Headphone out HDMI, Component, Digital Audio out, USB 3-pin plug
CONTROLS	Picture Sound Channel Parental Setup Others	Picture Settings, Picture Mode, Screen Size, PC Settings, Color Temperature, Backlight, Advanced Picture Settings, Noise Reduction Sound Setting, Analog Sound, Digital Sound, Digital Audio Output, Equalizer Setting Channel List, Favorite List, Channel Settings, Signal Type, Auto Channel Search, DTV signal Lock Parent Control, V-CHIP, Change Password, Keypad Lock, Source Lock, System Lock Closed Caption, Menu Language, Clock, OSD Transparency, OSD Timer Blue Back, No Signal Power Off, No Operation Power Off, User Monitor, Audio Only, TV ID (See user guide for complete OSD functionality

POWER	Voltage Consumption	AC 100-240V (universal), 50-60Hz 20W (max)
OPERATING CONDITIONS	Temperature Humidity	32-104°F (0–40°C) 20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical with stand Physical without stand Packaging	14.7 x 10.7 x 5.5 in. / 373.3 x 271.3 x 139.3 mm 14.7 x 9.0 x 1.66 in. / 373.3 x 227.5 x 145 mm 18.0 x 13.2 x 3.5 in. / 150 x 335 x 90 mm
BEZEL DIMENSIONS	Left/Right Top/Bottom	28.1 mm / 28.1 mm 28.1 mm / 32.9 mm
WEIGHT	Net with stand Net without stand Gross	2.9 lbs / 1.3 kg 2.5 lbs / 1.1 kg 9.5 lbs / 4.3 kg
WALL MOUNT	VESA®	75 x 75 mm
REGULATIONS		FCC, UL, RoHS, ENERGY STAR®, NOM
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		1-year limited warranty on parts and labor

#### What's in the box?

VT1602-L Display, power cord, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



\*Energy savings & lifespan may vary based on actual usage and other factors. Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2014 ViewSonic Corporation. All rights reserved. [17117-01B-09/14]

# Sales: (888) 881-8781 or SalesInfo@ViewSonic.com • More product information: www.ViewSonic.com