

W-300 Label Printer

Features

- Flexible
- Easy to use
- Desktop design
- Durable
- Connectivity
- Price conscious

Benefits

- Print direct thermal with heat sensitive labels or thermal transfer using our top quality ribbons (custom media available).
- Setup is quick and easy, with our quick start guide you will be able to start printing in minutes.
- The small profile design allows you to place the printer on your desk and still have the room for your other desktop equipment.
- Tough ABS plastic allows you to use it in your office or warehouse environments.
- Print using parallel or serial.
- The most economical solution for thermal printing.



W-300 Printer Specifications

PERFORMANCE

Print Method
Direct Thermal or
Thermal Transfer

Print Resolution
203 DPI

Print Width
Up to 4"

Memory
512K Standard

Print Speed
3 IPS (Inches Per Second)

MECHANICAL

Dimensions
W 7.3" x D 10.9" x H 6.0"

Weight
3.74 lbs

MEDIA

Ribbons
Wax, Wax Resin, and Resin

Labels
Direct Thermal and
Thermal Transfer

INTERFACES

Parallel

Serial

ELECTRICAL

Certifications
FCC Class B
E, UL and CU Approved

Operating Voltage
19 VAC, 24 DC

Current Consumption
2.5A, 50/60 Hz

ENVIRONMENTAL

Operating Temperature
40°F to 100°F

Storage Temperature
40°F to 140°F

Relative Humidity
15 to 85%


SYBBOLOGIES

Code 39, Code 128, UCC-128,
UPC-A, UPC-E, EAN/JAN-8,
EAN/JAN-13, Interleaved 2 of 5,
Codabar, MSI Plessey, PDF417

OPTIONAL MEDIA STACKER



OUTER DIMENSIONS

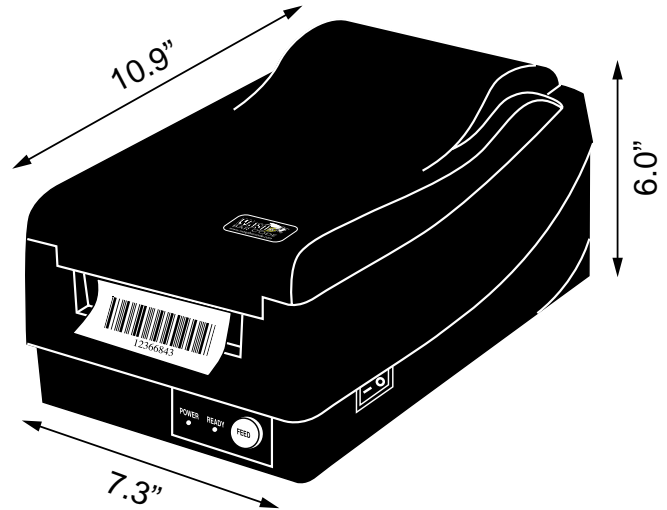

CONNECTION DIAGRAM

