

W-600 Label Printer

Features

- Durable
- Large workload capacity
- Speed
- Flexible
- Easy to use
- Connectivity

Benefits

- All-metal construction for tough warehouse and industrial environments.
- The W-600 easily prints thousands of labels per day in the toughest environments.
- 6 inches per second print speed.
- Print direct thermal with heat sensitive labels or thermal transfer using our top quality ribbons (custom media available).
- Setup is quick and easy, with our quick start guide you will be able to start printing in minutes.
- Print using the standard parallel port or through the optional RS232 serial port.



W-600 Printer Specifications

PERFORMANCE

Print Method

Direct Thermal or
Thermal Transfer

Print Resolution

203 DPI

Print Width

Up to 4.09"

Memory

2 MG Dram Standard

Print Speed

6 IPS (Inches Per Second)

MECHANICAL

Dimensions

W 9.8" x D 16.0" x H 10.2"

Weight

24.6 lbs

MEDIA

Ribbons

Wax, Wax Resin, and Resin

Labels

Direct Thermal and
Thermal Transfer

INTERFACES

Parallel

Serial (null modem cable required)

ELECTRICAL

Certifications

FCC Class A/B
CE, UL and CUL Approved

Operating Voltage

110/220 VAC

ENVIRONMENTAL

Operating Temperature

40°F to 100°F

Storage Temperature

40°F to 140°F


Relative Humidity

15 to 85%

SYMBOLOGIES

Code 39, Code 128, UCC-128,
UPC-A, UPC-E, EAN/JAN-8,
EAN/JAN-13, Interleaved 2 of 5,
Codabar, MSI Plessey, PDF417,
Maxicode

OUTER DIMENSIONS

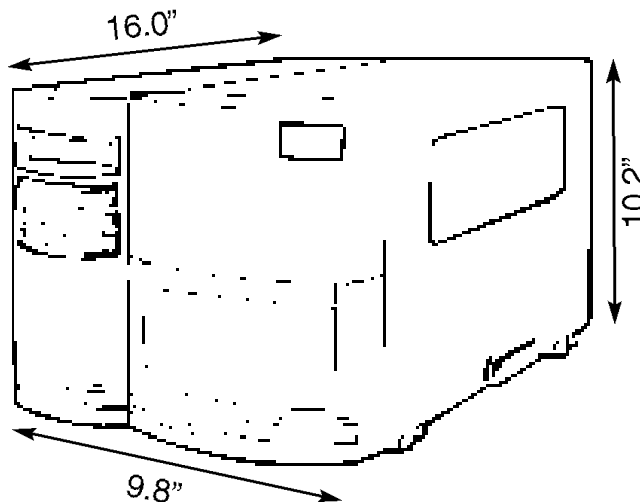

CONNECTION DIAGRAM

