PRODUCT SPEC SHEET THE ZEBRA MC55N0 SERIES



THE ZEBRA MC55N0 SERIES

RUGGED WI-FI ENTERPRISE MOBILE COMPUTER FOR MANAGERS AND TASK WORKERS

DRIVE PRODUCTIVITY AND EFFICIENCY INSIDE THE ENTERPRISE TO A NEW LEVEL

With the MC55N0 Series, managers and task workers who spend their days inside your company walls have everything they need to take instant action, anywhere in your facility ' indoors and outside. When it comes to meeting the needs of your workforce, the MC55N0 excels, offering organizations in the U.S. and Europe the right level of features, the right level of rugged design and support for the most demanding business applications. The result? Workers in retail, hospitality, manufacturing, healthcare and government agencies can complete more tasks more accurately in less time, improving productivity and customer care.

THE MOST RUGGED DESIGN YET IN THIS CLASS ' PERIOD

The MC55N0 Series is built to last, giving workers a device they can count on and businesses a maximum return on investment (ROI). This rugged device is built for use inside your buildings as well as outdoor areas of your facilities ' and our toughness tests prove it. The MC55N0 delivers outstanding performance, even after exposure to heat, cold, dust, water ' and 1,000 consecutive tumbles in our rotating tumble drum. And all models can be sanitized with many common cleaners without harming the housing or the sensitive electronics, helping prevent the spread of bacteria when devices are shared.

PURE BUSINESS ON THE INSIDE ' SMART STYLING ON THE OUTSIDE

The MC55N0 Series is the perfect blend of form and function. The comprehensive capabilities allow workers to scan bar codes; snap pictures; view videos and access business critical applications. The compact and lightweight mobile computer is easy to carry and easy to use, with a sleek design that is at home in front of customers.

THE POWER TO HANDLE VIRTUALLY ANY APPLICATION

Give your workers the best in class mobile application performance, even for the most demanding multimedia applications. Packed with the latest in technology, our powerful platform offers the most current mobile operating system for the enterprise, as well as the fastest processor and largest memory footprint in this device class. And the 802.11n radio substantially increases wireless bandwidth ' so you can count on your wireless applications to perform just as well as applications running on a wired desktop computer.

CAPTURE THE DATA YOU NEED ' WHEN AND WHERE YOU NEED IT

Three scanner options let you pick the model that will deliver the best performance for your organization. Our SE960 1 -D laser scan engine provides best-in-class performance for 1-D bar codes, including near contact to medium range decoding of even the widest bar code. And the two variants of our revolutionary SE4500 2-D imager deliver true laser-like performance and omnidirectional scanning of both 1-D and 2-D bar codes. The SE4500-SR offers the best range on medium and low density 1-D and 2-D bar codes. The SE4500-DL is optimized for medium to high density bar codes in addition to the bar codes found on driver's licenses and other identification documents ' ideal for border crossings as well as the healthcare and electronics industry. And if you need to capture photos, videos, or documents in addition to bar codes, no problem ' just add our high-resolution 3.2 MP autofocus color camera.





FEATURES HIGH-POWERED PLATFORM

MPA Zebra MAX MPA 2.0 Our latest

best-in-class standards-based technology architecture that provides numerous benefits **Powerful microprocessor designed for mobility** The Marvell® PXA320 @ 806 MHz provides

best-in-class application performance coupled with ubiquitous mobility inside the enterprise ' even on the most demanding multi-media applications

The memory to support any application

256MB RAM/1GB Flash and a user accessible microSD card slot with support up to 32GB provide the memory space required to enable robust performance for database and other processing intensive applications

The most advanced mobile operating system for the Enterprise

Microsoft's Windows® Mobile® 6.5 increases interoperability with existing enterprise infrastructure; enhances security features; provides a more flexible development platform; improves mobile messaging collaboration **Protects your application**

investments

Support for Zebra's Enterprise Mobility Developer Kit (EMDK) APIs preserves existing application investments by enabling easy and cost-effective porting of applications from other Zebra mobile computers

THE INTELLIGENCE TO SENSE AND ACT ON THE ENVIRONMENT

Get real value with our business-class implementation of the accelerometer. We start with the typical ability to automatically switch the display between portrait and landscape modes based on device orientation, and build from there. Right out of the box, you can get the power saving functionality that helps ensure full shift operation on a single battery charge. With just a few clicks, you can configure the device to enter sleep mode if movement is not detected in a specified period of time, or if the display is face down. In addition, the MC55N0 automatically detects and logs drops , helping to increase worker accountability for device condition. And the open architecture allows enterprises to integrate the accelerometer data into customized applications to improve the safety of technicians working in remote areas of your facility ' and prevent device theft.

THE ZEBRA ADVANTAGE: WORLD CLASS PARTNERS SUPPORT

When you choose Zebra, our award-winning partner channel provides access to a best-in-class, broad set of ready-to-go and custom applications in your industry, minimizing deployment time and cost. No matter what help your business might need, we have a service that delivers. If you are implementing your first mobility solution, we can provide assistance at every stage ' from planning and assessment through design, deployment and ongoing management and support. If you are adding new applications, we can help you identify whether your present wireless LAN can handle the increased load ' as well as any other gaps that need to be addressed to ensure smooth deployment. Since even the most rugged devices require a support plan, Service from the Start with Comprehensive Coverage will keep your devices up and running at peak performance. This unique all-inclusive service covers normal wear and tear as well as internal and external components damaged through accidental breakage, significantly reducing unforeseen repair expenses.

EMPOWER YOUR INDOOR WORKFORCE TO GET MORE DONE IN A DAY ' WITH THE ZEBRA MC55N0 SERIES

To find out how, visit <u>www.zebra.com/mc55N0</u> or access our global contacts directory at <u>www.zebra.com/contact</u>

SPECIFICATIONS CHART AVAILABLE IN U.S. AND EUROPE

COLOR CAME	RA	1-D LASER SCANNER (SE960)		
Resolution	3.2 megapixel	Optical Resolution	0.005 in. minimum element width	
Illumination	User controllable flash	Roll	± 35° from vertical	
Lens	Auto focus	Pitch Angle	± 65° from normal	
		Skew Tolerance	± 40° from normal	
PHYSICAL CHARACTERISTICS		Ambient Light	Tolerant to typical artificial indoor	
Dimensions	With rechargeable 2400 mAh Lithium Ion battery: 5.78 in. L x 3.03 in. W x 1.06 in. D 147 mm L x 77 mm W x 27 mm D	Immunity	and natural outdoor (direct sunlight) lighting conditions. Fluorescent, Incandescent, Mercury Vapor, Sodium Vapor, LED: 450 Ft Candles (4,844 Lux) Sunlight: 10000 Ft Candles (107,640 Lux) Note: LED lighting with high AC	
Weight	11.1 oz./315 g (with rechargeable 2400 mAh Lithium Ion battery)	-		
Display	3.5 in Color VGA, super bright 900 NITS		ripple content can impact scanning performance.	
Touch Panel	Glass analog resistive touch	Scan Rate	104 (± 12) scans/sec (bidirectional)	
Display Backlight	LED backlight	Scan Angle (typical)	Wide: (Default) 47°; Medium: 35°; Narrow: 10°	
Standard Battery	Rechargeable Lithium Ion 3.7V, 2400 mAh Smart Battery			
Extended Battery	Rechargeable Lithium Ion 3.7V, 3600 mAh Smart Battery	2-D IMAGER ENGINE (SE4500-SR AND SE4500-DL)		
Backup Battery	Ni-MH battery (rechargeable)	- Sensor Resolution	752 H x 480 V pixels (gray scale)	

ADVANCED WIRELESS CONNECTIVITY

Works on virtually any wireless LAN

The 802.11a/b/g/n quad-mode radio offers maximum WLAN bandwidth and throughput, improving application performance and availability; connects easily to any wireless LAN (WLAN) ' 2.4 GHz and 5 GHz bands

The most advanced Bluetooth functionality Bluetooth® v2.1 with EDR provides a wireless

provides a wireless connection to more device types, including modems and printers; simplifies pairing; improves security; reduces power consumption; supports either Microsoft or Stonestreet stacks

GOVERNMENT GRADE SECURITY OVER VIRTUALLY ANY WLAN

Make sure only authorized users н access your devices, your data and your network with Zebra MAX Secure Bring wired-line security to vour wireless communications without impacting wireless performance through a multitude of security features , including: support for all the latest encryption and authentication protocols: compatibility with Zebra's Mobile Security Suite for device-level protection (device level firewall, intrusion prevention, enforced authentication, data encryption and integrity monitoring protect the data that is resident on and in transit to and from your MC55A0/MC55N0 devices); and compatibility with Zebra's Mobile Virtual Private Networks (MVPNs)

THE MOST RUGGED DESIGN

Zebra MAX Rugged for industry leading rugged design ' and reliability Drop (impact) test

	18mAh 2.4V (not user accessible)	Roll	360°	
Expansion Slot	microSD slot (maximum 32GB)	Pitch Angle	± 60° from normal	
Comm. Interface	USB 1.1 Host and Client	Skew Tolerance	± 60° from normal	
Notification	Audible tone plus multi-color LEDs, Vibrate	Ambient Light	Total darkness to 9,000 ft. candles/96,900 lux	
Keypad Options	Numeric, QWERTY, AZERTY and QWERTZ	Aiming Element (VLD)	655 nm ± 10 nm	
Audio	Speaker, microphone, receiver (for handset mode use) and Bluetooth audio headsets	Illumination Element	625 nm ± 5 nm	
		Field of View	Horizontal: 40°; Vertical: 25°	
		Ranges		
PERFORMANC	E CHARACTERISTICS	SR Focus Range		
CPU	Marvell ^{i¢} PXA 320 @ 806 MHz processor	5 mil Code 39:	Near: 2.1 in./53 mm) Far: 7.5 in./191 mm	
Operating System	Microsoft® Windows Mobile® 6.5 Classic	100% UPC/EAN:	Near: 1.6 in./41 mm) Far: 15.5 in./394 mm	
Memory	256 MB RAM/1 GB Flash	6.7 mil PDF417:	Near: 3.4 in./86 mm Far: 7.1 in./180 mm	
USER ENVIRO	NMENT	DL Focus Range		
Operating Temp.	14° F to 122° F/-10° C to 50° C	5 mil Code 39:	Near: 1.4 in./36 mm	
Storage Temp.	-40° F to 158° F/-40° C to 70° C		Far: 7.3 in./185 mm	
Humidity	95% non-condensing	- 100% UPC/EAN: Near: 1.6 in./41 mm Far: 12 in./305 mm		
Drop Spec	Multiple 6 ft./1.8 m drops per MIL-STD 810G specifications	5 mil PDF417:	Near: 2.8 in./71 mm Far: 4.5 in./114 mm	
Tumble Spec	1000 1.6 ft./0.5 m tumbles (_		
	equivalent to 2,000 hits) per IEC tumble specifications	BATTERY PERFORMANCE		
Sealing	IP64 per IEC sealing specifications	User Profiles	Minimally 8 hours based on 600	
Clock	Integrated real time clock	. scans and WLAN transmits p hour with display on and star		
Electrostatic Discharge (ESD)	15KV Air 8KV Touch	-	capacity battery	
		DATA CAPTURE OPTIONS		
WIRELESS LAN VOICE AND DATA COMMUNICATIONS		Options	Multiple configurations available: 1- D SE960 laser scanner; 2-D	
Radio	Quad-mode IEEE® 802.11a/b/g/n	- SE4500-SR imager; 2-D SE450 DL imager; 3.2 megapixel colo		
Security	Legacy, WPA and WPA2 WEP (40 or 104 bit), TKIP and	-	camera option available	
	AES			

TLS, TTLS (MS-CHAP), TTLS (

Antenna

Data Rates

Supported

PERIPHERALS AND ACCESSORIES*

MS-CHAP v2), TTLS (CHAP), TTLS (MD5), TTLS (PAP), PEAP-TLS, PEAP (MSCHAP v2), PEAP (EAP-GTC), EAP-FAST-TLS, EAP-FAST (MS-CHAP v2), EAP-FAST (EAP-GTC) and LEAP	Communication and Battery Chargers/ Cradles	Charge only cable; auto charge cable; USB charge/sync cable; 4 slot battery charger toaster; 4-slot Ethernet cradle; 4-slot charge only cradle; single slot USB cradle; vehicle holder using auto charge cable; vehicle cradle with charging
Internal		capabilities
802.11b/g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps	Vertical Specific Attachments	Snap-on magnetic stripe reader (MSR); snap-on trigger handle

Multiple 6 ft./1.8 m drops per MIL-STD 810G Tumble (endurance) test per IEC tumble specifications Reliable operation after 1,000 1.6 ft./0.5 m consecutive tumbles (2,000 hits) in Zebra's tumble drum IP64 sealing per IEC sealing specifications Complete protection against dust and splashing liquids Patented Monocoque ' unibody' housing Greatly improves structural stability and ability to handle the twisting common in a fall or bump Patented industrial-grade connector Improves the reliability and durability of the accessory point of interface Improved shock absorption for internal components A rigid yet lightweight magnesium frame encases the main circuit board and all electronics Rugged display construction

Space between display and touchscreen helps prevent damage to the display

AUTOMATE THE **CAPTURE OF** VIRTUALLY ANY **TYPE OF DATA**

101100 Zebra MAX Data Capture for

advanced highperformance multi- mode data capture Choose one of four bar code scanning options that can read even damaged and

1-D Scanners

poor quality codes:

SE960: High performance 1-D scanning ' adaptive scanning maximizes the range and enables scanning of codes that are damaged or underneath shrinkwrap.

2-D Imagers

Zebra's SE4500 latest generation 2-D imager offers unparalleled laser-like performance on both 1-D and 2-D bar codes and omnidirectional rapid-fire easy scanning ' no need to

	802.11a: 6, 9, 12, 18, 24, 36, 48 and 54 Mbps 802.11n: MCS0 to MSC7 up to	Soft Goods	Rigid and soft case holsters, Bluetooth headsets	align bar code and aiming pattern. Choose one of two - options:	
Operating Channels	72.2 Mbps Chan 36-165 (5180 ' 5825 MHz), Chan 1-13 (2412-2472 MHz)	* Visit www.zeba.c available peripher accessories	om/mc55n0 for a complete list of als and	SE4500-SR: Optimized for low/medium density standard range scanning of 1-D/2-D bar codes	
		REGULATOR	ΥY	 SE4500-DL: Optimized for medium to high density 1-D/ 	
Bluetooth	Class II, v 2.1 Enhanced Data Rate (EDR); integrated antenna	Electrical Safety	Certified to UL 60950-1, second edition, CAN/CSA-C22.2 No. 60950-1-07, IEC 60950-1 Edition 2.0 2005-12, EN 60950-1:2006 + A11:2009	2-D bar codes as well as the PDF bar codes found on driver's licenses and other identification cards ' ideal for gate access and border crossings for identity	
CLEANING INST		Environmental	RoHS-compliant	 management; patient wristbands and unit doses in 	
Active Ingredients: any cleaner m some combina isopropyl alcol hypochlorite; h mild dish soap Harmful Ingredients: The following of to damage the MC55N0 Serie come in conta ammonia solut amines or amr ketones; ether chlorinated hydrocarbons; alcoholic alkali ethanolamine; trichloroethyler	100% of the active ingredients in any cleaner must consist of one or some combination of the following:	WLAN and Bluetooth (PAN)	<u>USA:</u> FCC Part 15.247, 15.407 <u>EU:</u> EN 300 328, EN 301 893	 healthcare point of care applications; and the high density codes common in the electronics industry High resolution camera Add a 3.2 MP auto-focus flash-enabled digital color camera with user-controllable flash to capture photos, videos, documents with legible fine print and bar codes (for intermittent scanning applications) BUSINESS-CLASS MOTION SENSING Zebra MAX Sensor for the intelligence 	
	isopropyl alcohol; bleach/sodium hypochlorite; hydrogen peroxide; mild dish soap The following chemicals are known to damage the plastics on the MC55N0 Series and should not	RF Exposure	USA: FCC Part 2, FCC OET Bulletin 65 Supplement C EU: EN 50360: 2001 (Max average 10g SAR 0.472 W/Kg), EN 62311: 2008, EN 62209-1:2006, EN62209 -2:2010, EN62479:2010		
	come in contact with the device: ammonia solutions, compounds of amines or ammonia; acetone; ketones; ethers; aromatic and chlorinated hydrocarbons; acqueous or alcoholic alkaline solutions; ethanolamine; toluene; trichloroethylene; benzene; carbolic acid and TB-lysoform.	EMI/RFI	USA: FCC Part 15, Class B <u>EU:</u> EN55022 Class B, EN 55024: 1998 + A1: 2001 + A2: 2003, EN 61000-3-2: 2006 (Class B), EN 61000-3-3: 2008, EN 50121-3-2: 2006, EN 50121-4: 2006, EN 301 489-1, EN 301 489-17, EN 60601- 1-2, IEC 60601-1-2: 2007, (Modified)		
Cleaning Instructions:	Do not apply liquid directly to the MC55N0 Series. Dampen a soft cloth or use premoistened wipes. Do not wrap the device in the cloth or wipe, but gently wipe the unit.	Laser Safety	IEC/Class 2/FDA II in accordance with IEC60825-1: (Ed 2.0)/EN 60825-1:2007	to sense ' and act ' on motion Automatically rotates screen to match device orientation; automatically reverts to sleep	
		WARRANTY		 automation (revenue to shopp mode when not in use to preserve battery power; landscape mode improves the display of data-intensive applications; enables utilization of sensor data in custom applications 	
Special Cleaning	Be careful not to let liquid pool around the display window or other places. Allow the unit to air dry before use.		es is warranted against defects in materials for a period of 12 months nent, provided that the product ed and is operated under normal and		
Notes:	phthalate additives, which are	proper conditions			
	often not recommended for medical use and are known to be harmful to the housing of the MC55N0 Series. The mobile computers should not be handled while wearing vinyl gloves containing phthalates, or before hands are washed to remove contaminant residue after gloves are removed. If products containing any of the harmful ingredients listed above are used prior to handling the MC55N0 Series, such as hand sanitizers that contain ethanolamine, hands must be completely dry before	RECOMMENDED SERVICES		ADVANCED ERGONOMICS	
		Customer Service	s: Managed Device Service Support; Start with Comprehensive Coverage	Advanced sleek design for ease of use and user comfort Specifically designed for one-handed operation ' data entry is easy regardless of hand size with minimal movement Crystal clear text and graphics with Zebra MAX Display 3.5 inch extra-crisp high-resolution color VGA touchscreen display is easy	

handling the MC55N0 Series to prevent damage to the plastics.

to view in virtually any lighting condition ' indoors and outside; additional white pixel improves contrast; energy-efficient engineering delivers twice the brightness at half the power of typical displays

A family of keypads for global data entry flexibility Numeric, QWERTY, AZERTY and QWERTZ support a wide range of applications all around the world

PRESERVE EXISTING ACCESSORY INVESTMENTS


Backwards compatibility with all MC55 accessories Upgrade to the latest mobile technology advancements while preserving your existing accessory investments

EASY CENTRALIZED MANAGEMENT

Easy global remote management of your devices ' and their accessories Compatibility with Zebra's Mobility Services Platform (MSP) enables comprehensive and flexible centralized management of a broad range of mobile products and their attached peripherals, anywhere in the world, all from a single console

END-TO-END SUPPORT SERVICES

Increase uptime and reduce support costs with all-inclusive support plan Optional Service from the Start with Comprehensive Coverage covers normal wear and tear as well as internal and external components damaged through accidental breakage for both device and select accessories

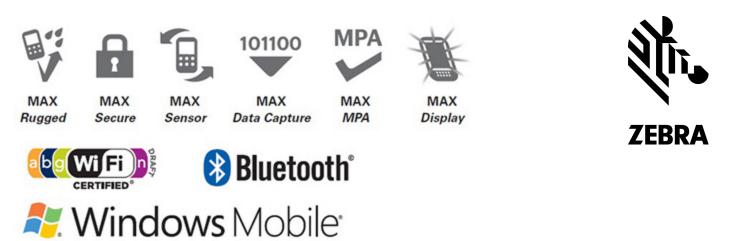

Part Number SS-MC55N0. Printed in USA 04/15. ©2015 ZIH Corp. ZEBRA, the Zebra head graphic and Zebra Technologies logo are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All rights reserved. All other trademarks are the property of their respective owners.

ZEBRA TECHNOLOGIES