

SPECIFICATIONS

MYW-BA

Long Distance Adaptor For MY/MK Series Video Door Stations

DESCRIPTION:


The MYW-BA adaptor is designed for applications where a video door station is required, but is beyond the standard distance limitation of 330'. The MYW-BA can be used with the MY or MK video door stations. Aiphone specified cable (#851602) is required.

The MYW-BA extends the maximum distance of an MY or MK door station to 980 feet. When using a modular audio/video system, an audio intercom (LEF, IE, or TD-H/B) is required with the video for a complete system. The type of intercom depends on the user's needs and the total distance specifications.


FEATURES:

- Video door station can be up to 980' away from monitor
- Works with all MY and MK video systems

MOUNTING:



SYSTEM LAYOUT EXAMPLE:

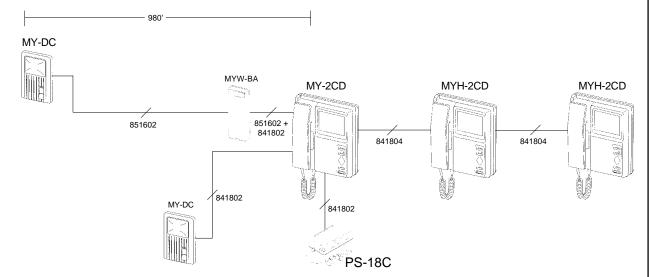

SPECIFICATIONS:

Power Source: 18V DC. Use PS-18C for first 3 video units, including adaptor and monitors.

Use PS-18YC/A for each additional 2 monitors.

Current consumption: Max. 250mA. (1mA in standby)

Scanning lines: 525 lines

Wiring distance: MY Camera to MYW-BA Adaptor: Max. 980' with Aiphone wire #851602 MYW-BA to MY-CU or MYW Adaptor: 165' with Aiphone wire #851602

MYW-BA to Power Supply: 23' with Aiphone wire #841802

WIT W-BA to Power Supply. 23 With Alphone Wil

Dimensions: 7-1/2"H x 3"W x 1-5/8"D