


PowerDsine 3001/3001G

Compact and Cost-Effective 1-Port Power over Ethernet Midspans

PowerDsine's Power over Ethernet (PoE) single port Midspans offer a compact and cost effective, fully IEEE 802.3af compliant solution for remote powering of wireless LAN (WLAN) access points, IP Security cameras and other low port density installations.

The 3001/3001G PoE Midspans eliminate the need for external power supply and its associated AC/DC power cabling, providing a compact, affordable, safe and reliable power solution over existing Ethernet infrastructure.

The 3001G PoE Midspan can power both existing 10/100 baseT network devices and emerging Gigabit devices such as Wireless Wi-Max access points and remote distance wireless IEEE 802.11n access points.

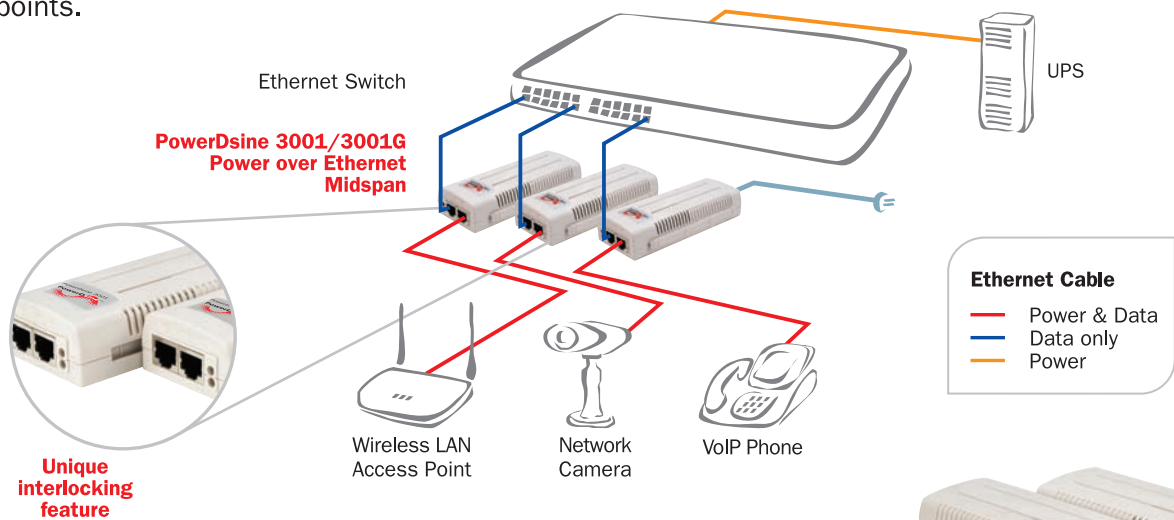

Benefits

- Cost-effective power distribution for WLAN access point installations
- Safe powering of standard compliant, as well as Pre-standard end-terminals
- Investment protection of existing Ethernet switches and cabling infrastructure
- Saves time and reduces installation costs
- Easy plug-and-play installation
- Several units can be mounted adjacently for powering more than one Ethernet terminal
- Cleans up low-density wireless LAN deployment and eliminates the need for multiple one-port PoE solutions.
- Support Gigabit Ethernet data transmission for applications such as Wi-Max access points; Gig IP phones; IP cameras*

Features

- Fully IEEE 802.3af standard compliant
- Compatible with IEEE 802.3af or legacy Cisco powered devices
- Safe and reliable powering of WLAN access points
- Automatic detection and protection of non – standard Ethernet terminals
- Support 10/100/1000BaseT applications*
- Compact design specifically tailored for WLAN access point installation
- Unique interlocking feature to connect multiple units
- Internal AC/DC converter - no need for external power brick.

* Applicable for PD-3001G/AC only



The Power over Ethernet Pioneers

PowerDsine 3001/3001G

Compact and Cost-Effective 1-Port Power over Ethernet Midspan



Description of Features

- **Standard Compliance** - PowerDsine's 3001/3001G PoE Midspans are fully compatible with IEEE 802.3af standard. It features a standard auto-sensing algorithm and provides safe power to remote terminals.
- **Upgrade Legacy Ethernet Switches** - The PowerDsine 3001/3001G PoE midspans connect to legacy Ethernet infrastructure, enable users to upgrade their existing Ethernet switches and provide power over Ethernet capabilities. The PowerDsine 3001/3001G generate safe power over standard Category 5 cabling. By sending 48V, Ethernet terminals such as wireless LAN access points, IP Phones and network cameras are powered remotely. An external splitter may be installed where a device is not standard compliant.
- **Compact Design** - PowerDsine's 3001/3001G Power over Ethernet Midspans are small and compact standalone product. No additional components are needed. Just add an IEC320 standard line cord.
- **Scalable Design** - PowerDsine's 3001/3001G have an exclusive interlocking feature which connects multiple units together side by side to support more than one wireless LAN access point. It is especially designed for small business and low-port density installations.
- **Centralized Power Distribution** - Deploying a PoE midspan in conjunction with a central UPS provides a cost-effective way to distribute backup power and ensures uninterrupted operation of the network during electrical power failure.
- **Easy to Install** - PowerDsine's 3001/3001G PoE Midspans are plug-and-play devices. Once turned on, they automatically detect the Power over Ethernet terminal and supply Power over Ethernet.
- **Concise LED Displays** - The PowerDsine's 3001/3001G have two LEDs, indicating normal, overload or short-circuit conditions.
- **Powering Gigabit devices** - The PowerDsine's 3001G supports existing 10/100Mbps devices as well as the new emerging 1000Mbps terminals, thus powers terminals in Gigabit environment.

Specifications

No. of Ports	1
Data Rates	3001/AC: 10/100 Mbps 3001G/AC: 10/100/1000 Mbps
Power over Ethernet Pin Assignment and Polarity:	3001: Output 4/5 (+), 7/8 (-) 3001G: Output 4/5 (+), 7/8 (-) Output Power Voltage: -48V User Port Power: 15.4W min.
Input Power Requirements	AC Input Voltage: 90 to 264 Vac AC Input Current: 0.5A @ 110-220 Vac AC Frequency: 47 to 63 Hz
Dimensions	58.5 mm (W) x 31 mm (H) x 145 mm (L)
Weight	1 lbs (450 g)
Indicators System Indicator:	AC Power (Green) User Indicator: Channel Power (Green)
Connectors	Shielded RJ-45, EIA 568A and 568B
Environmental Conditions	Operating Ambient Temperature: 32° to 104°F (0° to 40°C) Operating Humidity: Maximum 90%, Non-condensing Storage Temperature: -4° to 158°F (-20° to 70°C) Storage Humidity: Maximum 93%, Non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Regulatory Compliance	CE
Electromagnetic Emission & Immunity	FCC Part 15, Class B with FTP cabling EN 55022 (CISPR 22) Class B with FTP cabling EN 55024 (CISPR 24), VCCI
Safety Approvals	UL/cUL Per EN 60950 GS Mark Per EN 60950

Ordering Information

Order Number	Description
1-port Power over Ethernet Midspan	
PD-3001/AC	AC input
PD-3001G/AC	1-Port with Gigabit support, AC input
* Midspans also available in 6 and 12 port versions.	

International Headquarters


PowerDsine Ltd.
1 Hanagar St.
P.O.Box 7220
Hod Hasharon 45421
Israel
Tel: +972-9-7755100
Fax: +972-9-7755111
sales@powerdsine.com

North America

PowerDsine, Inc.
290 BroadHollow Road
Suite 305E
Melville, NY 11747
Tel: +1-631-756-4680
Fax: +1-631-756-4691
sales@powerdsineusa.com

Europe

PowerDsine UK
Lakeside House
1 Furzeground Way
Stockley Park, Uxbridge
UB11 1BD, United Kingdom
Tel: +44 (0) 208 622 3107
Fax: +44 (0) 208 622 3200
uk@powerdsine.com



www.powerdsine.com